

Specification · **Superseded**

Open Model Context Protocol

Version 2024-11-05

Built from [7596f66](#) · 2026-09-23

SUPERSEDED

This version has been superseded by 2026-07-28.

Contents

1 Specification

Overview

Key Details

Security and Trust & Safety

Learn More

2 Architecture

Core Components

Design Principles

Message Types

Capability Negotiation

3 Base Protocol

3.1 Overview

Protocol Layers

Auth

Schema

3.2 Lifecycle

Lifecycle Phases

Error Handling

3.3 Messages

Requests

Responses

Notifications

3.4 Transports

stdio

HTTP with SSE

Custom Transports

3.5 Utilities

3.5.1 Cancellation

Cancellation Flow

Behavior Requirements

Timing Considerations

Implementation Notes

Error Handling

3.5.2 Ping

Overview

Message Format

Behavior Requirements

Usage Patterns

Implementation Considerations

Error Handling

3.5.3 Progress

Progress Flow

Behavior Requirements

Implementation Notes

4 Client Features

4.1 Roots

- User Interaction Model
- Capabilities
- Protocol Messages
- Message Flow
- Data Types
- Error Handling
- Security Considerations
- Implementation Guidelines

4.2 Sampling

- User Interaction Model
- Capabilities
- Protocol Messages
- Message Flow
- Data Types
- Error Handling
- Security Considerations

5 Server Features

5.1 Overview

5.2 Prompts

- User Interaction Model
- Capabilities
- Protocol Messages
- Message Flow
- Data Types
- Error Handling
- Implementation Considerations
- Security

5.3 Resources

- User Interaction Model
- Capabilities
- Protocol Messages
- Message Flow
- Data Types
- Common URI Schemes
- Error Handling
- Security Considerations

5.4 Tools

- User Interaction Model
- Capabilities
- Protocol Messages
- Message Flow
- Data Types
- Error Handling
- Security Considerations

5.5 Utilities

5.5.1 Completion

User Interaction Model

Protocol Messages

Message Flow

Data Types

Implementation Considerations

Security

5.5.2 Logging

User Interaction Model

Capabilities

Log Levels

Protocol Messages

Message Flow

Error Handling

Implementation Considerations

Security

5.5.3 Pagination

Pagination Model

Response Format

Request Format

Pagination Flow

Operations Supporting Pagination

Implementation Guidelines

Error Handling

1 Specification

Model Context Protocol (MCP) is an open protocol that enables seamless integration between LLM applications and external data sources and tools. Whether you're building an AI-powered IDE, enhancing a chat interface, or creating custom AI workflows, MCP provides a standardized way to connect LLMs with the context they need.

This specification defines the authoritative protocol requirements, based on the TypeScript schema in [schema.ts](#).

For implementation guides and examples, visit openmodelcontextprotocol.org.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

Overview

MCP provides a standardized way for applications to:

- Share contextual information with language models
- Expose tools and capabilities to AI systems
- Build composable integrations and workflows

The protocol uses [JSON-RPC 2.0](#) messages to establish communication between:

- **Hosts:** LLM applications that initiate connections
- **Clients:** Connectors within the host application
- **Servers:** Services that provide context and capabilities

MCP takes some inspiration from the [Language Server Protocol](#), which standardizes how to add support for programming languages across a whole ecosystem of development tools. In a similar way, MCP standardizes how to integrate additional context and tools into the ecosystem of AI applications.

Key Details

Base Protocol

- [JSON-RPC](#) message format
- Stateful connections
- Server and client capability negotiation

Features

Servers offer any of the following features to clients:

- **Resources:** Context and data, for the user or the AI model to use
- **Prompts:** Templated messages and workflows for users
- **Tools:** Functions for the AI model to execute

Clients may offer the following feature to servers:

- **Sampling:** Server-initiated agentic behaviors and recursive LLM interactions

Additional Utilities

- Configuration
- Progress tracking
- Cancellation
- Error reporting
- Logging

Security and Trust & Safety

The Model Context Protocol enables powerful capabilities through arbitrary data access and code execution paths. With this power comes important security and trust considerations that all implementors must carefully address.

Key Principles

1. User Consent and Control

- Users must explicitly consent to and understand all data access and operations
- Users must retain control over what data is shared and what actions are taken
- Implementors should provide clear UIs for reviewing and authorizing activities

2. Data Privacy

- Hosts must obtain explicit user consent before exposing user data to servers
- Hosts must not transmit resource data elsewhere without user consent
- User data should be protected with appropriate access controls

3. Tool Safety

- Tools represent arbitrary code execution and must be treated with appropriate caution
- Hosts must obtain explicit user consent before invoking any tool
- Users should understand what each tool does before authorizing its use

4. LLM Sampling Controls

- Users must explicitly approve any LLM sampling requests
- Users should control:

- Whether sampling occurs at all
- The actual prompt that will be sent
- What results the server can see
- The protocol intentionally limits server visibility into prompts

Implementation Guidelines

While MCP itself cannot enforce these security principles at the protocol level, implementors **SHOULD**:

1. Build robust consent and authorization flows into their applications
2. Provide clear documentation of security implications
3. Implement appropriate access controls and data protections
4. Follow security best practices in their integrations
5. Consider privacy implications in their feature designs

Learn More


Explore the detailed specification for each protocol component:

[Architecture](#)[Base Protocol](#)[Server Features](#)[Client Features](#)[Contributing](#)

2 Architecture

The Model Context Protocol (MCP) follows a client-host-server architecture where each host can run multiple client instances. This architecture enables users to integrate AI capabilities across applications while maintaining clear security boundaries and isolating concerns. Built on JSON-RPC, MCP provides a stateful session protocol focused on context exchange and sampling coordination between clients and servers.

Core Components

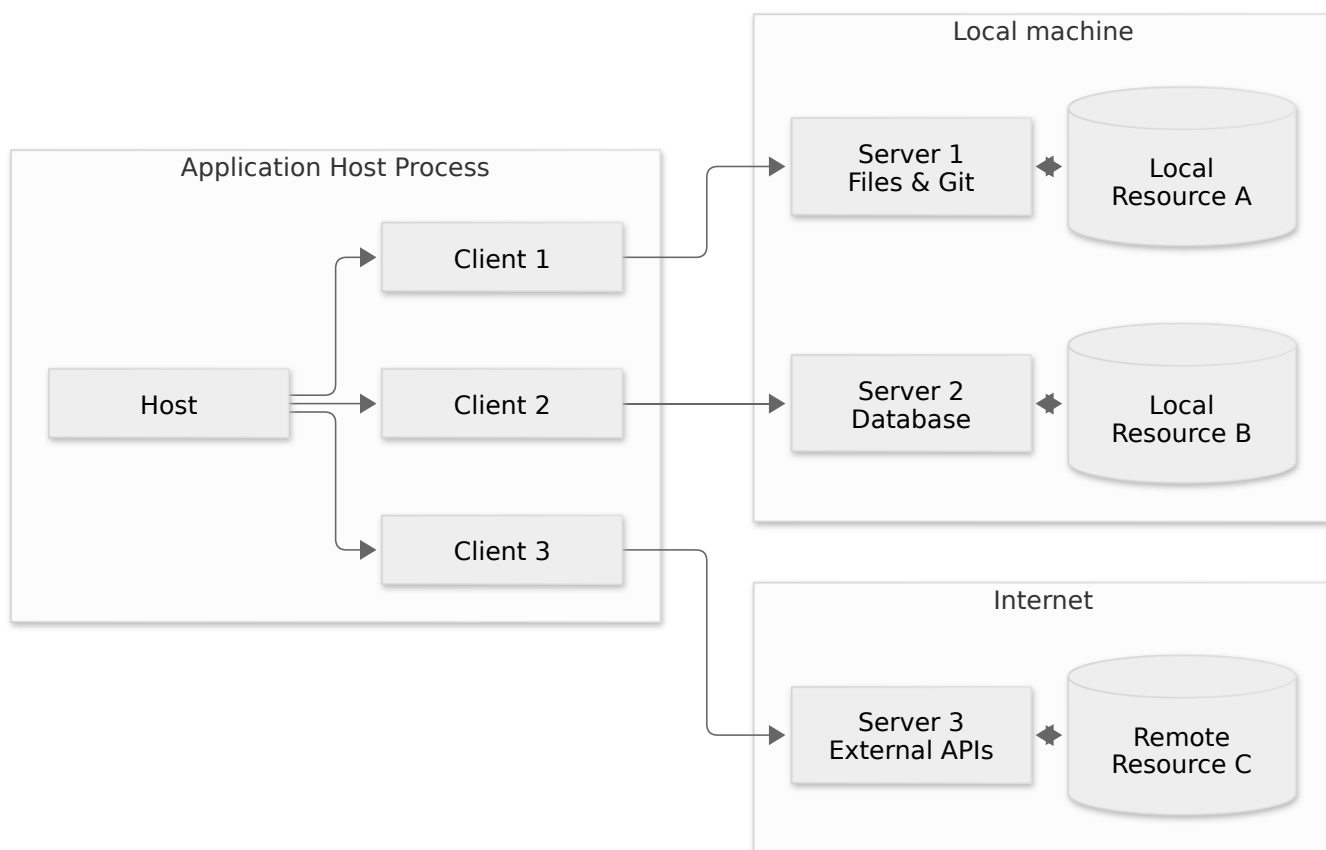

Host

The host process acts as the container and coordinator:

- Creates and manages multiple client instances
- Controls client connection permissions and lifecycle
- Enforces security policies and consent requirements
- Handles user authorization decisions

- Coordinates AI/LLM integration and sampling
- Manages context aggregation across clients

Clients

Each client is created by the host and maintains an isolated server connection:

- Establishes one stateful session per server
- Handles protocol negotiation and capability exchange
- Routes protocol messages bidirectionally
- Manages subscriptions and notifications
- Maintains security boundaries between servers

A host application creates and manages multiple clients, with each client having a 1:1 relationship with a particular server.

Servers

Servers provide specialized context and capabilities:

- Expose resources, tools and prompts via MCP primitives
- Operate independently with focused responsibilities
- Request sampling through client interfaces
- Must respect security constraints
- Can be local processes or remote services

Design Principles

MCP is built on several key design principles that inform its architecture and implementation:

1. Servers should be extremely easy to build

- Host applications handle complex orchestration responsibilities
- Servers focus on specific, well-defined capabilities
- Simple interfaces minimize implementation overhead
- Clear separation enables maintainable code

2. Servers should be highly composable

- Each server provides focused functionality in isolation
- Multiple servers can be combined seamlessly
- Shared protocol enables interoperability
- Modular design supports extensibility

3. Servers should not be able to read the whole conversation, nor "see into" other servers

- Servers receive only necessary contextual information
- Full conversation history stays with the host
- Each server connection maintains isolation

- Cross-server interactions are controlled by the host
- Host process enforces security boundaries

4. Features can be added to servers and clients progressively

- Core protocol provides minimal required functionality
- Additional capabilities can be negotiated as needed
- Servers and clients evolve independently
- Protocol designed for future extensibility
- Backwards compatibility is maintained

Message Types

MCP defines three core message types based on [JSON-RPC 2.0](#):


- **Requests:** Bidirectional messages with method and parameters expecting a response
- **Responses:** Successful results or errors matching specific request IDs
- **Notifications:** One-way messages requiring no response

Each message type follows the JSON-RPC 2.0 specification for structure and delivery semantics.

Capability Negotiation

The Model Context Protocol uses a capability-based negotiation system where clients and servers explicitly declare their supported features during initialization. Capabilities determine which protocol features and primitives are available during a session.

- Servers declare capabilities like resource subscriptions, tool support, and prompt templates
- Clients declare capabilities like sampling support and notification handling
- Both parties must respect declared capabilities throughout the session
- Additional capabilities can be negotiated through extensions to the protocol

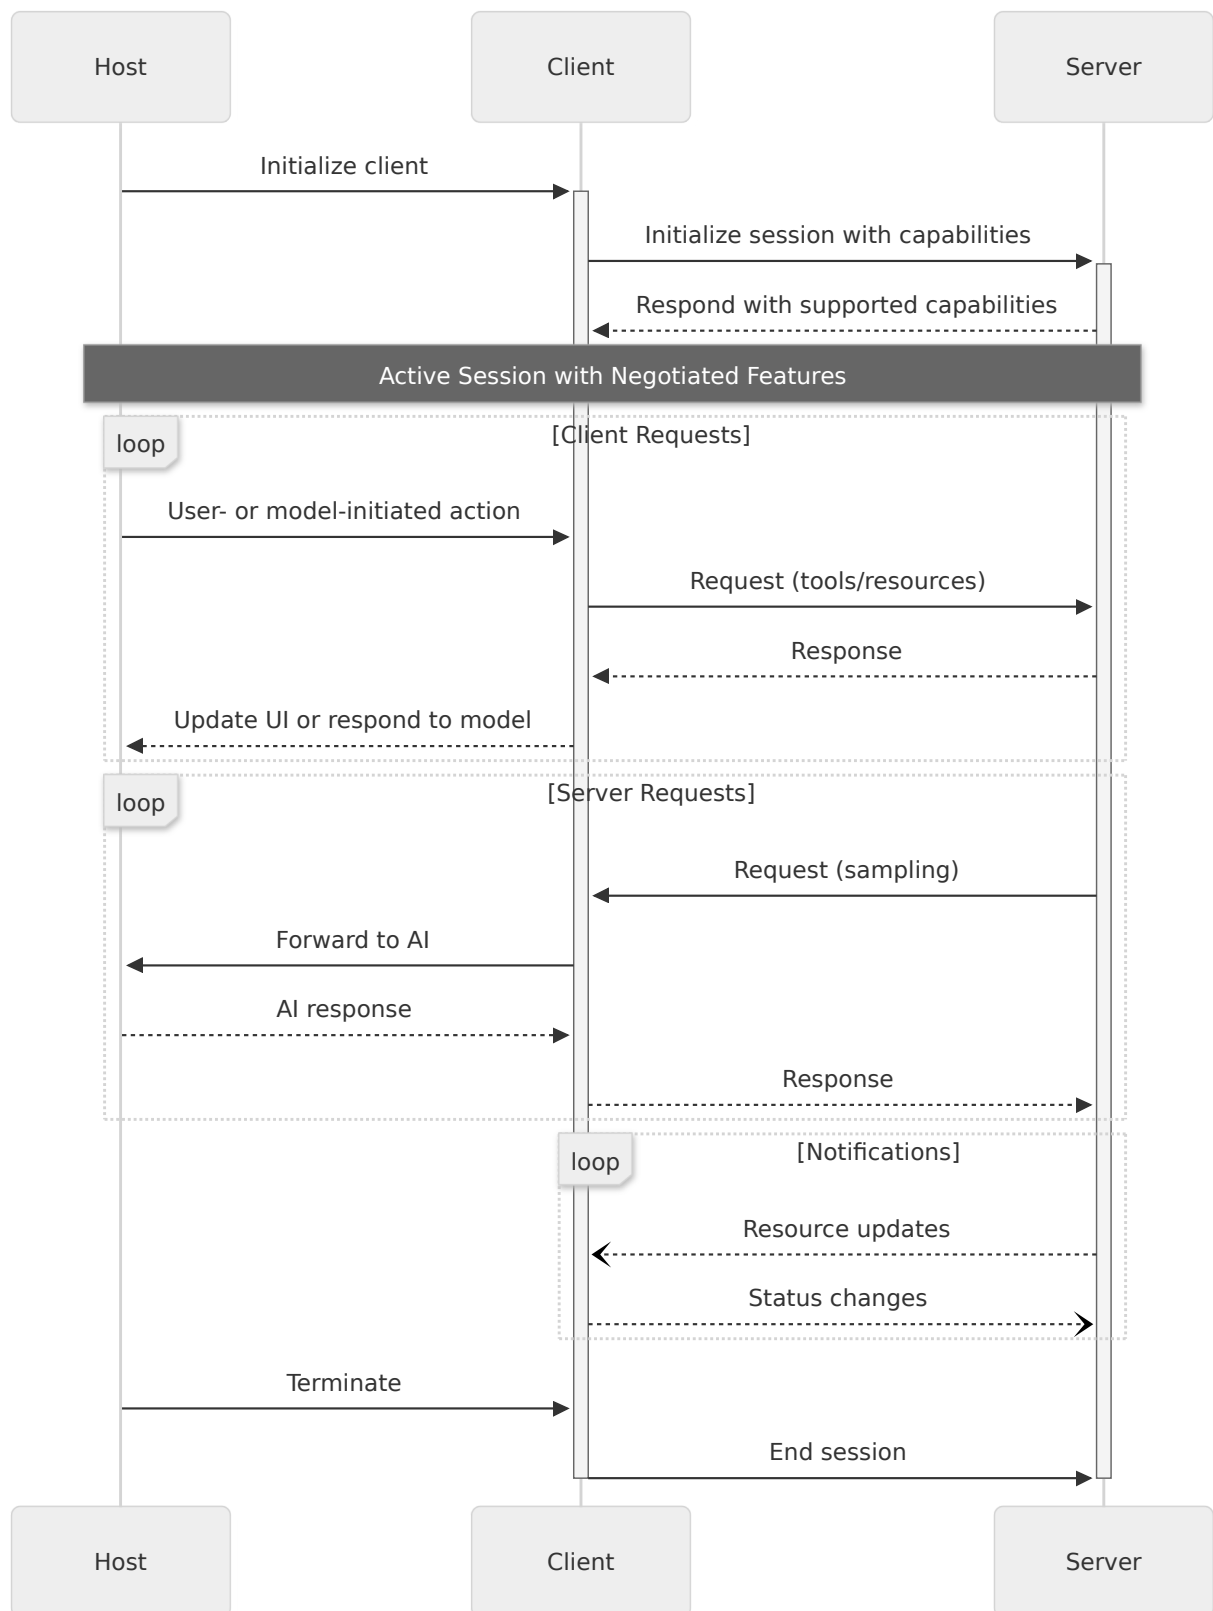

Each capability unlocks specific protocol features for use during the session. For example:

- Implemented server features must be advertised in the server's capabilities
- Emitting resource subscription notifications requires the server to declare subscription support
- Tool invocation requires the server to declare tool capabilities
- Sampling requires the client to declare support in its capabilities

This capability negotiation ensures clients and servers have a clear understanding of supported functionality while maintaining protocol extensibility.

3 Base Protocol

3.1 Overview

All messages between MCP clients and servers **MUST** follow the [JSON-RPC 2.0](#) specification. The protocol defines three fundamental types of messages:

Type	Description	Requirements
Requests	Messages sent to initiate an operation	Must include unique ID and method name
Responses	Messages sent in reply to requests	Must include same ID as request
Notifications	One-way messages with no reply	Must not include an ID

Responses are further sub-categorized as either **successful results** or **errors**. Results can follow any JSON object structure, while errors must include an error code and message at minimum.

Protocol Layers

The Model Context Protocol consists of several key components that work together:

- **Base Protocol:** Core JSON-RPC message types
- **Lifecycle Management:** Connection initialization, capability negotiation, and session control
- **Server Features:** Resources, prompts, and tools exposed by servers
- **Client Features:** Sampling and root directory lists provided by clients
- **Utilities:** Cross-cutting concerns like logging and argument completion

All implementations **MUST** support the base protocol and lifecycle management components. Other components **MAY** be implemented based on the specific needs of the application.

These protocol layers establish clear separation of concerns while enabling rich interactions between clients and servers. The modular design allows implementations to support exactly the features they need.

See the following pages for more details on the different components:

Lifecycle

Resources

Prompts**Tools****Logging****Sampling**

Auth

Authentication and authorization are not currently part of the core MCP specification, but we are considering ways to introduce them in future. Join us in [GitHub Discussions](#) to help shape the future of the protocol!

Clients and servers **MAY** negotiate their own custom authentication and authorization strategies.

Schema


The full specification of the protocol is defined as a [TypeScript schema](#). This is the source of truth for all protocol messages and structures.

There is also a [JSON Schema](#), which is automatically generated from the TypeScript source of truth, for use with various automated tooling.

3.2 Lifecycle

The Model Context Protocol (MCP) defines a rigorous lifecycle for client-server connections that ensures proper capability negotiation and state management.

1. **Initialization:** Capability negotiation and protocol version agreement
2. **Operation:** Normal protocol communication
3. **Shutdown:** Graceful termination of the connection

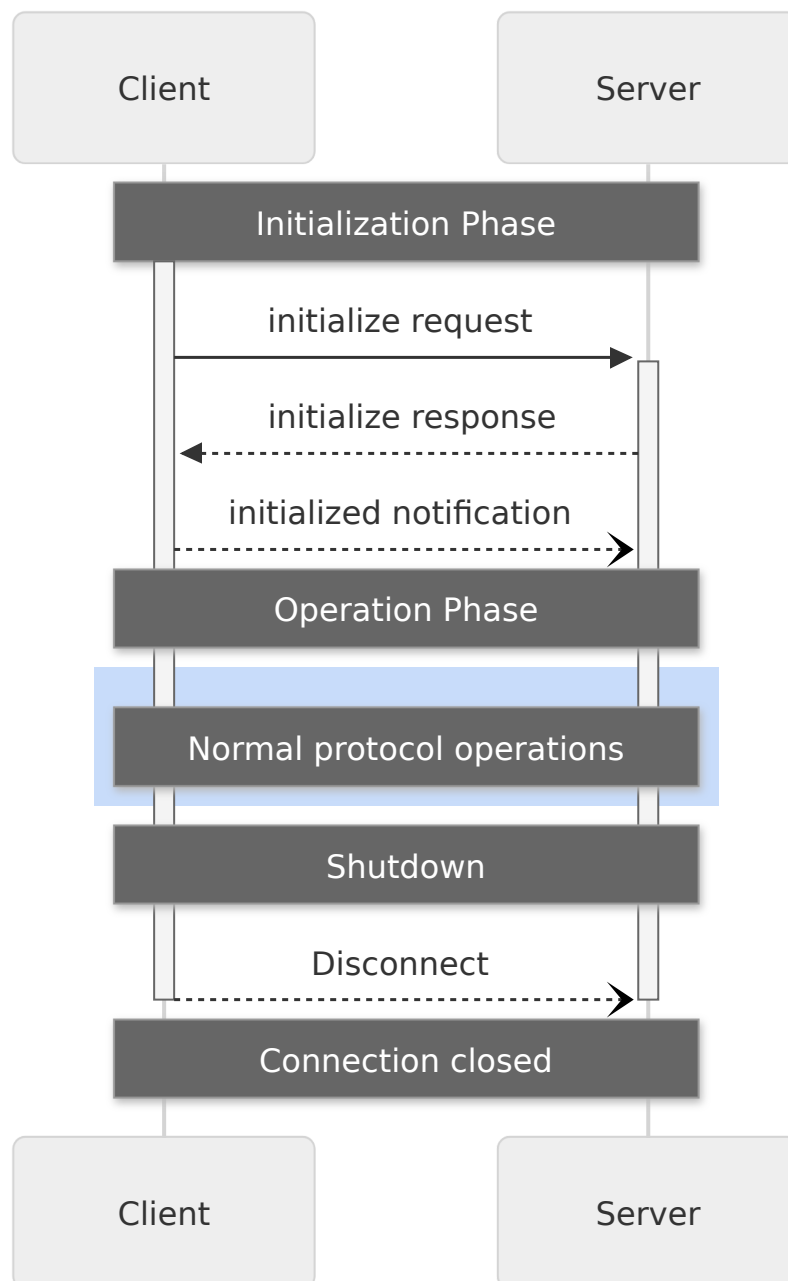

Lifecycle Phases

Initialization

The initialization phase **MUST** be the first interaction between client and server. During this phase, the client and server:

- Establish protocol version compatibility
- Exchange and negotiate capabilities
- Share implementation details

The client **MUST** initiate this phase by sending an `initialize` request containing:

- Protocol version supported
- Client capabilities
- Client implementation information

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "method": "initialize",
  "params": {
    "protocolVersion": "2024-11-05",
    "capabilities": {
      "roots": {
        "listChanged": true
      },
      "sampling": {}
    },
    "clientInfo": {
      "name": "ExampleClient",
      "version": "1.0.0"
    }
  }
}
```

The server **MUST** respond with its own capabilities and information:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "result": {
    "protocolVersion": "2024-11-05",
    "capabilities": {
      "logging": {},
      "prompts": {
        "listChanged": true
      },
      "resources": {
        "subscribe": true,
        "listChanged": true
      },
      "tools": {
        "listChanged": true
      }
    },
    "serverInfo": {
      "name": "ExampleServer",
      "version": "1.0.0"
    }
  }
}
```

After successful initialization, the client **MUST** send an `initialized` notification to indicate it is ready to begin normal operations:

```
{
  "jsonrpc": "2.0",
  "method": "notifications/initialized"
}
```

- The client **SHOULD NOT** send requests other than pings before the server has responded to the `initialize` request.
- The server **SHOULD NOT** send requests other than pings and logging before receiving the `initialized` notification.

Version Negotiation

In the `initialize` request, the client **MUST** send a protocol version it supports. This **SHOULD** be the *latest* version supported by the client.

If the server supports the requested protocol version, it **MUST** respond with the same version. Otherwise, the server **MUST** respond with another protocol version it supports. This **SHOULD** be the *latest* version supported by the server.

If the client does not support the version in the server's response, it **SHOULD** disconnect.

Capability Negotiation

Client and server capabilities establish which optional protocol features will be available during the session.

Key capabilities include:

Category	Capability	Description
Client	roots	Ability to provide filesystem roots
Client	sampling	Support for LLM sampling requests
Client	experimental	Describes support for non-standard experimental features
Server	prompts	Offers prompt templates
Server	resources	Provides readable resources
Server	tools	Exposes callable tools
Server	logging	Emits structured log messages
Server	experimental	Describes support for non-standard experimental features

Capability objects can describe sub-capabilities like:

- listChanged : Support for list change notifications (for prompts, resources, and tools)
- subscribe : Support for subscribing to individual items' changes (resources only)

Operation

During the operation phase, the client and server exchange messages according to the negotiated capabilities.

Both parties **SHOULD**:

- Respect the negotiated protocol version
- Only use capabilities that were successfully negotiated

Shutdown

During the shutdown phase, one side (usually the client) cleanly terminates the protocol connection. No specific shutdown messages are defined—instead, the underlying transport mechanism should be used to signal connection termination:

stdio

For the stdio transport, the client **SHOULD** initiate shutdown by:

1. First, closing the input stream to the child process (the server)
2. Waiting for the server to exit, or sending `SIGTERM` if the server does not exit within a reasonable time
3. Sending `SIGKILL` if the server does not exit within a reasonable time after `SIGTERM`

The server **MAY** initiate shutdown by closing its output stream to the client and exiting.

HTTP

For HTTP transports, shutdown is indicated by closing the associated HTTP connection(s).

Error Handling

Implementations **SHOULD** be prepared to handle these error cases:

- Protocol version mismatch
- Failure to negotiate required capabilities
- Initialize request timeout
- Shutdown timeout

Implementations **SHOULD** implement appropriate timeouts for all requests, to prevent hung connections and resource exhaustion.

Example initialization error:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "error": {
    "code": -32602,
    "message": "Unsupported protocol version",
    "data": {
      "supported": ["2024-11-05"],
      "requested": "1.0.0"
    }
  }
}
```

3.3 Messages

All messages in MCP **MUST** follow the [JSON-RPC 2.0](#) specification. The protocol defines three types of messages:

Requests

Requests are sent from the client to the server or vice versa.

```
{
  jsonrpc: "2.0";
  id: string | number;
  method: string;
  params?: {
    [key: string]: unknown;
  };
}
```

- Requests **MUST** include a string or integer ID.
- Unlike base JSON-RPC, the ID **MUST NOT** be `null`.
- The request ID **MUST NOT** have been previously used by the requestor within the same session.

Responses

Responses are sent in reply to requests.

```
{
  jsonrpc: "2.0";
  id: string | number;
  result?: {
    [key: string]: unknown;
  }
  error?: {
    code: number;
    message: string;
    data?: unknown;
  }
}
```

- Responses **MUST** include the same ID as the request they correspond to.

- Either a `result` or an `error` **MUST** be set. A response **MUST NOT** set both.
- Error codes **MUST** be integers.

Notifications

Notifications are sent from the client to the server or vice versa. They do not expect a response.

```
{  
  jsonrpc: "2.0";  
  method: string;  
  params?: {  
    [key: string]: unknown;  
  };  
}
```

- Notifications **MUST NOT** include an ID.

3.4 Transports

MCP currently defines two standard transport mechanisms for client-server communication:

1. stdio, communication over standard in and standard out
2. HTTP with Server-Sent Events (SSE)


Clients **SHOULD** support stdio whenever possible.

It is also possible for clients and servers to implement custom transports in a pluggable fashion.

stdio

In the **stdio** transport:

- The client launches the MCP server as a subprocess.
- The server receives JSON-RPC messages on its standard input (`stdin`) and writes responses to its standard output (`stdout`).
- Messages are delimited by newlines, and **MUST NOT** contain embedded newlines.
- The server **MAY** write UTF-8 strings to its standard error (`stderr`) for logging purposes. Clients **MAY** capture, forward, or ignore this logging.
- The server **MUST NOT** write anything to its `stdout` that is not a valid MCP message.
- The client **MUST NOT** write anything to the server's `stdin` that is not a valid MCP message.

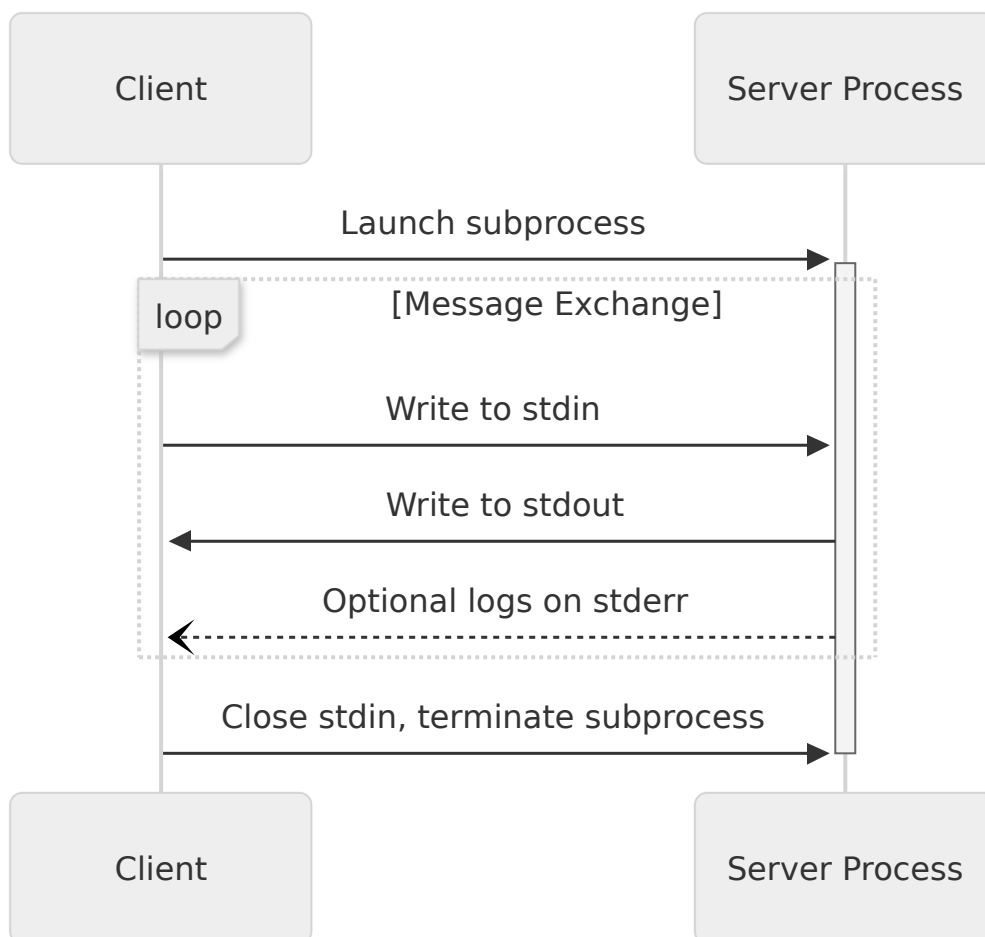

HTTP with SSE

In the **SSE** transport, the server operates as an independent process that can handle multiple client connections.

Security Warning

When implementing HTTP with SSE transport:

1. Servers **MUST** validate the `Origin` header on all incoming connections to prevent DNS rebinding attacks
2. When running locally, servers **SHOULD** bind only to localhost (127.0.0.1) rather than all network interfaces (0.0.0.0)
3. Servers **SHOULD** implement proper authentication for all connections


Without these protections, attackers could use DNS rebinding to interact with local MCP servers from remote websites.

The server **MUST** provide two endpoints:

1. An SSE endpoint, for clients to establish a connection and receive messages from the server
2. A regular HTTP POST endpoint for clients to send messages to the server

When a client connects, the server **MUST** send an `endpoint` event containing a URI for the client to use for sending messages. All subsequent client messages **MUST** be sent as HTTP POST requests to this endpoint.

Server messages are sent as SSE `message` events, with the message content encoded as JSON in the event data.

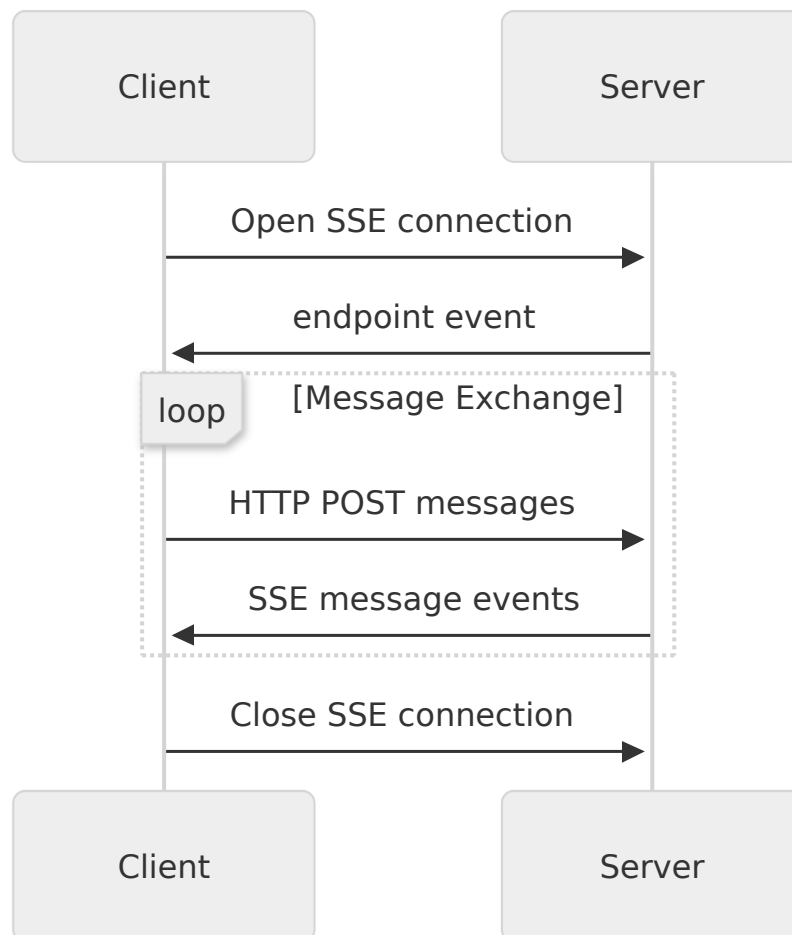

Custom Transports

Clients and servers **MAY** implement additional custom transport mechanisms to suit their specific needs. The protocol is transport-agnostic and can be implemented over any communication channel that supports bidirectional message exchange.

Implementers who choose to support custom transports **MUST** ensure they preserve the JSON-RPC message format and lifecycle requirements defined by MCP. Custom transports **SHOULD** document their specific connection establishment and message exchange patterns to aid interoperability.

3.5 Utilities

3.5.1 Cancellation

The Model Context Protocol (MCP) supports optional cancellation of in-progress requests through notification messages. Either side can send a cancellation notification to indicate that a previously-issued request should be terminated.

Cancellation Flow

When a party wants to cancel an in-progress request, it sends a `notifications/cancelled` notification containing:

- The ID of the request to cancel
- An optional reason string that can be logged or displayed

```
{
  "jsonrpc": "2.0",
  "method": "notifications/cancelled",
  "params": {
    "requestId": "123",
    "reason": "User requested cancellation"
  }
}
```


Behavior Requirements

1. Cancellation notifications **MUST** only reference requests that:
 - Were previously issued in the same direction
 - Are believed to still be in-progress
2. The `initialize` request **MUST NOT** be cancelled by clients
3. Receivers of cancellation notifications **SHOULD**:
 - Stop processing the cancelled request
 - Free associated resources
 - Not send a response for the cancelled request
4. Receivers **MAY** ignore cancellation notifications if:
 - The referenced request is unknown
 - Processing has already completed
 - The request cannot be cancelled
5. The sender of the cancellation notification **SHOULD** ignore any response to the request that arrives afterward

Timing Considerations

Due to network latency, cancellation notifications may arrive after request processing has completed, and potentially after a response has already been sent.

Both parties **MUST** handle these race conditions gracefully:

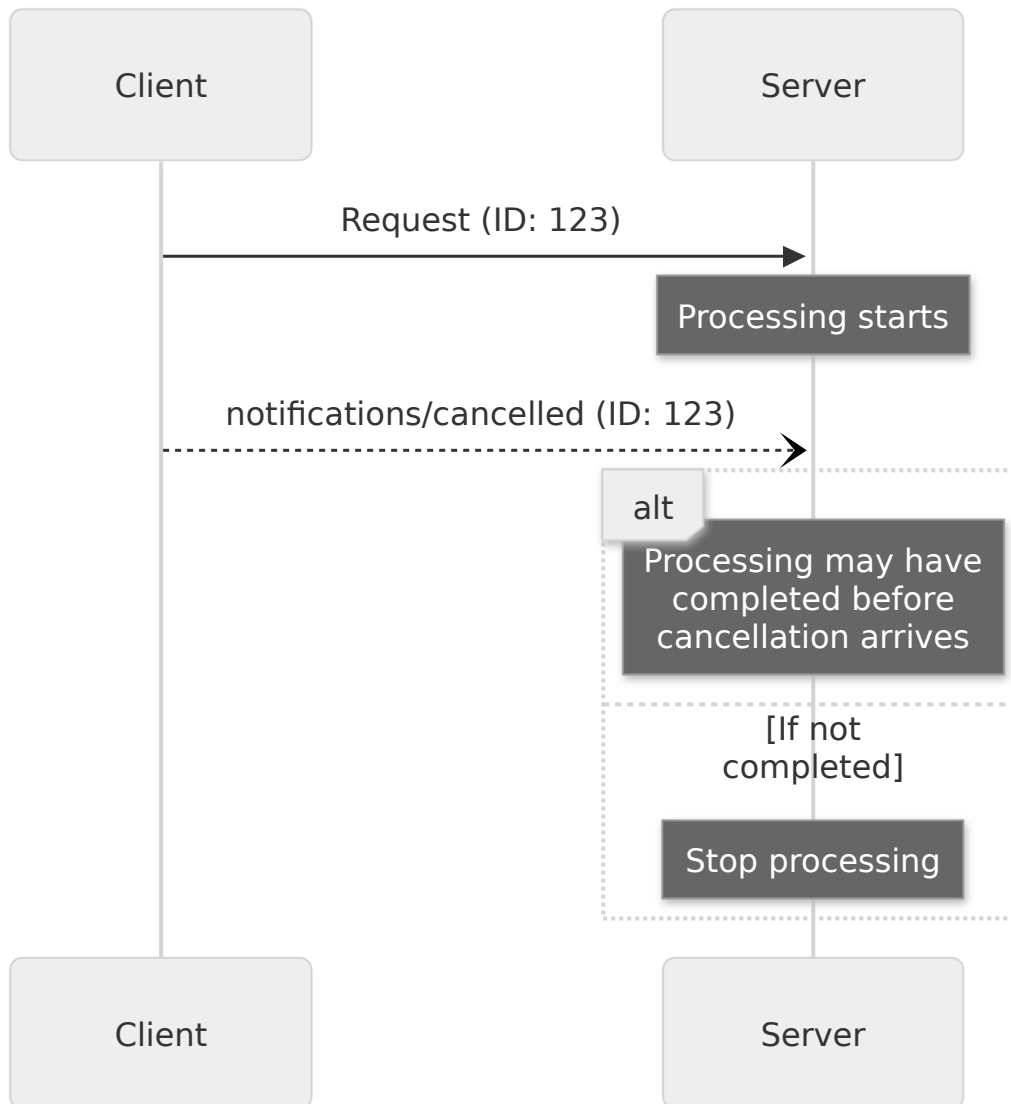

Implementation Notes

- Both parties **SHOULD** log cancellation reasons for debugging
- Application UIs **SHOULD** indicate when cancellation is requested

Error Handling

Invalid cancellation notifications **SHOULD** be ignored:

- Unknown request IDs
- Already completed requests

- Malformed notifications

This maintains the "fire and forget" nature of notifications while allowing for race conditions in asynchronous communication.

3.5.2 Ping

The Model Context Protocol includes an optional ping mechanism that allows either party to verify that their counterpart is still responsive and the connection is alive.

Overview

The ping functionality is implemented through a simple request/response pattern. Either the client or server can initiate a ping by sending a `ping` request.

Message Format

A ping request is a standard JSON-RPC request with no parameters:

```
{
  "jsonrpc": "2.0",
  "id": "123",
  "method": "ping"
}
```


Behavior Requirements

1. The receiver **MUST** respond promptly with an empty response:

```
{
  "jsonrpc": "2.0",
  "id": "123",
  "result": {}
}
```

2. If no response is received within a reasonable timeout period, the sender **MAY**:
 - Consider the connection stale
 - Terminate the connection
 - Attempt reconnection procedures

Usage Patterns

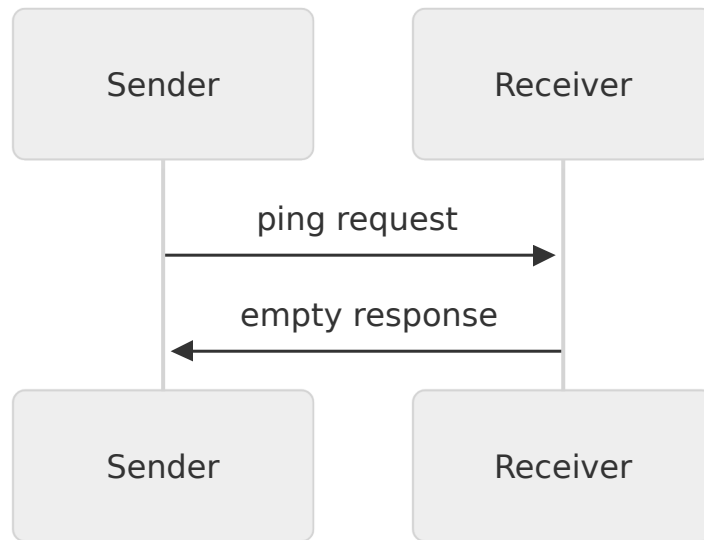

Implementation Considerations

- Implementations **SHOULD** periodically issue pings to detect connection health
- The frequency of pings **SHOULD** be configurable
- Timeouts **SHOULD** be appropriate for the network environment
- Excessive pinging **SHOULD** be avoided to reduce network overhead

Error Handling

- Timeouts **SHOULD** be treated as connection failures
- Multiple failed pings **MAY** trigger connection reset
- Implementations **SHOULD** log ping failures for diagnostics

3.5.3 Progress

The Model Context Protocol (MCP) supports optional progress tracking for long-running operations through notification messages. Either side can send progress notifications to provide updates about operation status.

Progress Flow

When a party wants to *receive* progress updates for a request, it includes a `progressToken` in the request metadata.

- Progress tokens **MUST** be a string or integer value
- Progress tokens can be chosen by the sender using any means, but **MUST** be unique across all active requests.

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "method": "some_method",
  "params": {
    "_meta": {
      "progressToken": "abc123"
    }
  }
}
```

The receiver **MAY** then send progress notifications containing:

- The original progress token
- The current progress value so far
- An optional "total" value


```
{
  "jsonrpc": "2.0",
  "method": "notifications/progress",
  "params": {
    "progressToken": "abc123",
    "progress": 50,
    "total": 100
  }
}
```

- The `progress` value **MUST** increase with each notification, even if the total is unknown.

- The `progress` and the `total` values **MAY** be floating point.

Behavior Requirements

1. Progress notifications **MUST** only reference tokens that:
 - Were provided in an active request
 - Are associated with an in-progress operation
2. Receivers of progress requests **MAY**:
 - Choose not to send any progress notifications
 - Send notifications at whatever frequency they deem appropriate
 - Omit the total value if unknown

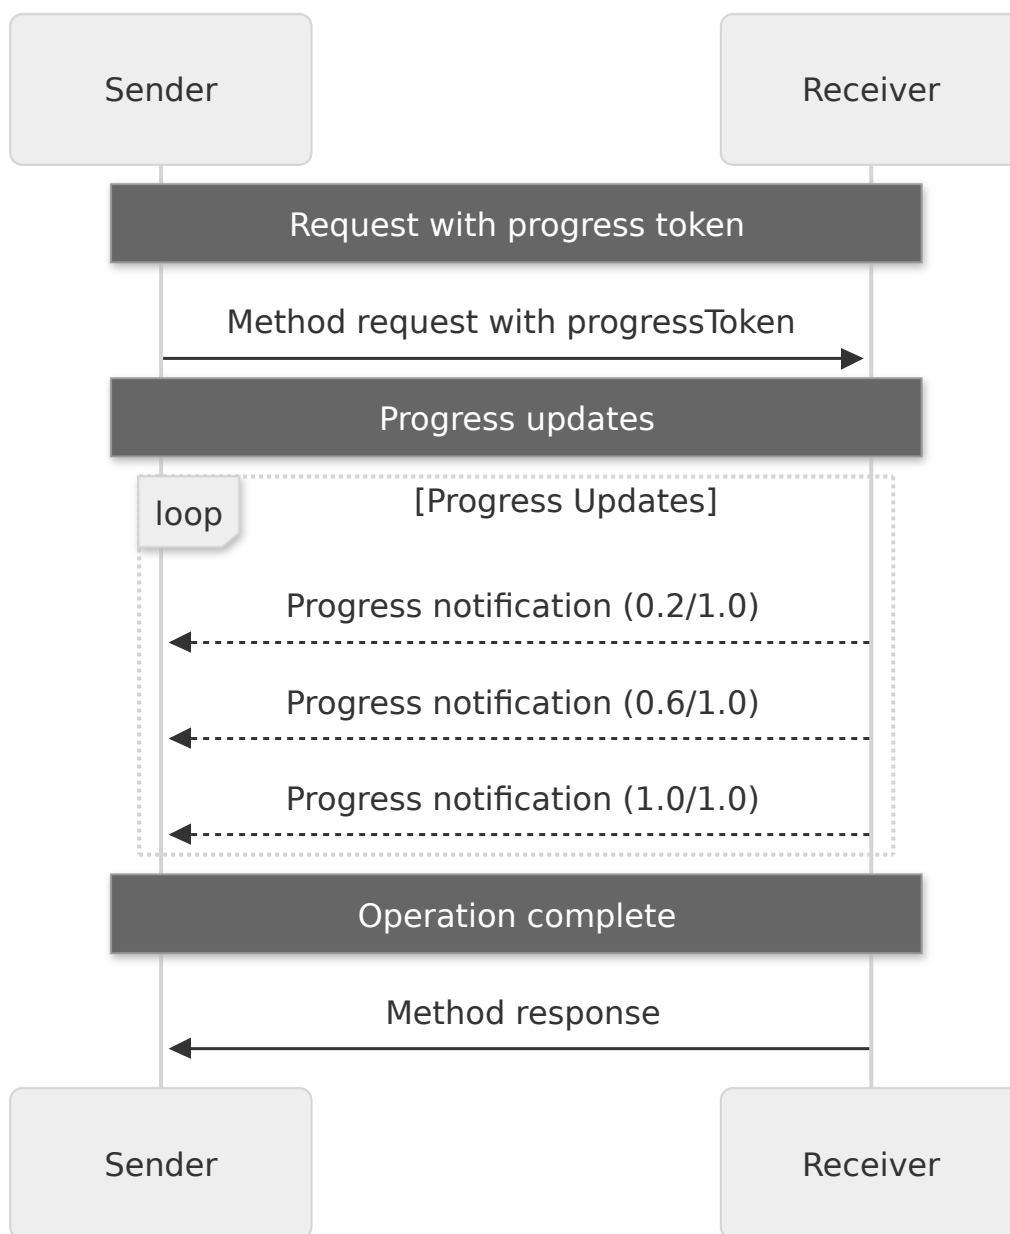

Implementation Notes

- Senders and receivers **SHOULD** track active progress tokens
- Both parties **SHOULD** implement rate limiting to prevent flooding
- Progress notifications **MUST** stop after completion

4 Client Features

4.1 Roots

The Model Context Protocol (MCP) provides a standardized way for clients to expose filesystem "roots" to servers. Roots define the boundaries of where servers can operate within the filesystem, allowing them to understand which directories and files they have access to. Servers can request the list of roots from supporting clients and receive notifications when that list changes.

User Interaction Model

Roots in MCP are typically exposed through workspace or project configuration interfaces.

For example, implementations could offer a workspace/project picker that allows users to select directories and files the server should have access to. This can be combined with automatic workspace detection from version control systems or project files.

However, implementations are free to expose roots through any interface pattern that suits their needs—the protocol itself does not mandate any specific user interaction model.

Capabilities

Clients that support roots **MUST** declare the `roots` capability during initialization:

```
{
  "capabilities": {
    "roots": {
      "listChanged": true
    }
  }
}
```

`listChanged` indicates whether the client will emit notifications when the list of roots changes.

Protocol Messages

Listing Roots

To retrieve roots, servers send a `roots/list` request:

Request:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "method": "roots/list"
}
```

Response:


```
{
  "jsonrpc": "2.0",
  "id": 1,
  "result": {
    "roots": [
      {
        "uri": "file:///home/user/projects/myproject",
        "name": "My Project"
      }
    ]
  }
}
```

Root List Changes

When roots change, clients that support `listChanged` **MUST** send a notification:

```
{
  "jsonrpc": "2.0",
  "method": "notifications/roots/list_changed"
}
```

Message Flow

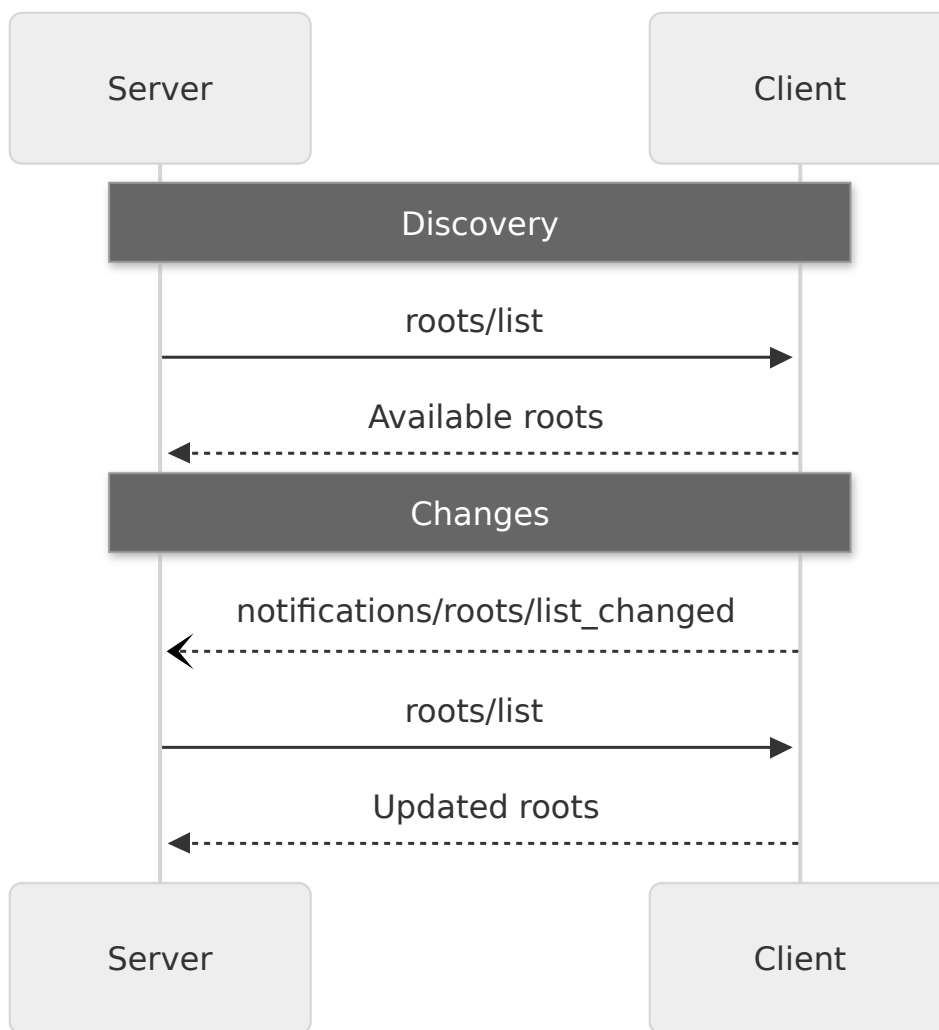

Data Types

Root

A root definition includes:

- `uri` : Unique identifier for the root. This **MUST** be a `file://` URI in the current specification.
- `name` : Optional human-readable name for display purposes.

Example roots for different use cases:

Project Directory

```
{
  "uri": "file:///home/user/projects/myproject",
  "name": "My Project"
}
```

Multiple Repositories

```
[
  {
    "uri": "file:///home/user/repos/frontend",
    "name": "Frontend Repository"
  },
  {
    "uri": "file:///home/user/repos/backend",
    "name": "Backend Repository"
  }
]
```

Error Handling

Clients **SHOULD** return standard JSON-RPC errors for common failure cases:

- Client does not support roots: `-32601` (Method not found)
- Internal errors: `-32603`

Example error:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "error": {
    "code": -32601,
    "message": "Roots not supported",
    "data": {
      "reason": "Client does not have roots capability"
    }
  }
}
```

Security Considerations

1. Clients **MUST**:

- Only expose roots with appropriate permissions
- Validate all root URIs to prevent path traversal
- Implement proper access controls
- Monitor root accessibility

2. Servers **SHOULD**:

- Handle cases where roots become unavailable
- Respect root boundaries during operations
- Validate all paths against provided roots

Implementation Guidelines

1. Clients **SHOULD**:

- Prompt users for consent before exposing roots to servers
- Provide clear user interfaces for root management
- Validate root accessibility before exposing
- Monitor for root changes

2. Servers **SHOULD**:

- Check for roots capability before usage
- Handle root list changes gracefully
- Respect root boundaries in operations
- Cache root information appropriately

4.2 Sampling

The Model Context Protocol (MCP) provides a standardized way for servers to request LLM sampling ("completions" or "generations") from language models via clients. This flow allows clients to maintain control over model access, selection, and permissions while enabling servers to leverage AI capabilities—with no server API keys necessary. Servers can request text or image-based interactions and optionally include context from MCP servers in their prompts.

User Interaction Model

Sampling in MCP allows servers to implement agentic behaviors, by enabling LLM calls to occur *nested* inside other MCP server features.

Implementations are free to expose sampling through any interface pattern that suits their needs—the protocol itself does not mandate any specific user interaction model.

WARNING

For trust & safety and security, there **SHOULD** always be a human in the loop with the ability to deny sampling requests.

Applications **SHOULD**:

- Provide UI that makes it easy and intuitive to review sampling requests
- Allow users to view and edit prompts before sending
- Present generated responses for review before delivery

Capabilities

Clients that support sampling **MUST** declare the `sampling` capability during initialization:

```
{
  "capabilities": {
    "sampling": {}
  }
}
```

Protocol Messages

Creating Messages

To request a language model generation, servers send a `sampling/createMessage` request:

Request:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "method": "sampling/createMessage",
  "params": {
    "messages": [
      {
        "role": "user",
        "content": {
          "type": "text",
          "text": "What is the capital of France?"
        }
      }
    ],
    "modelPreferences": {
      "hints": [
        {
          "name": "claude-3-sonnet"
        }
      ],
      "intelligencePriority": 0.8,
      "speedPriority": 0.5
    },
    "systemPrompt": "You are a helpful assistant.",
    "maxTokens": 100
  }
}
```


Response:

```

{
  "jsonrpc": "2.0",
  "id": 1,
  "result": {
    "role": "assistant",
    "content": {
      "type": "text",
      "text": "The capital of France is Paris."
    },
  },
  "model": "claude-3-sonnet-20240307",
  "stopReason": "endTurn"
}

```

Message Flow

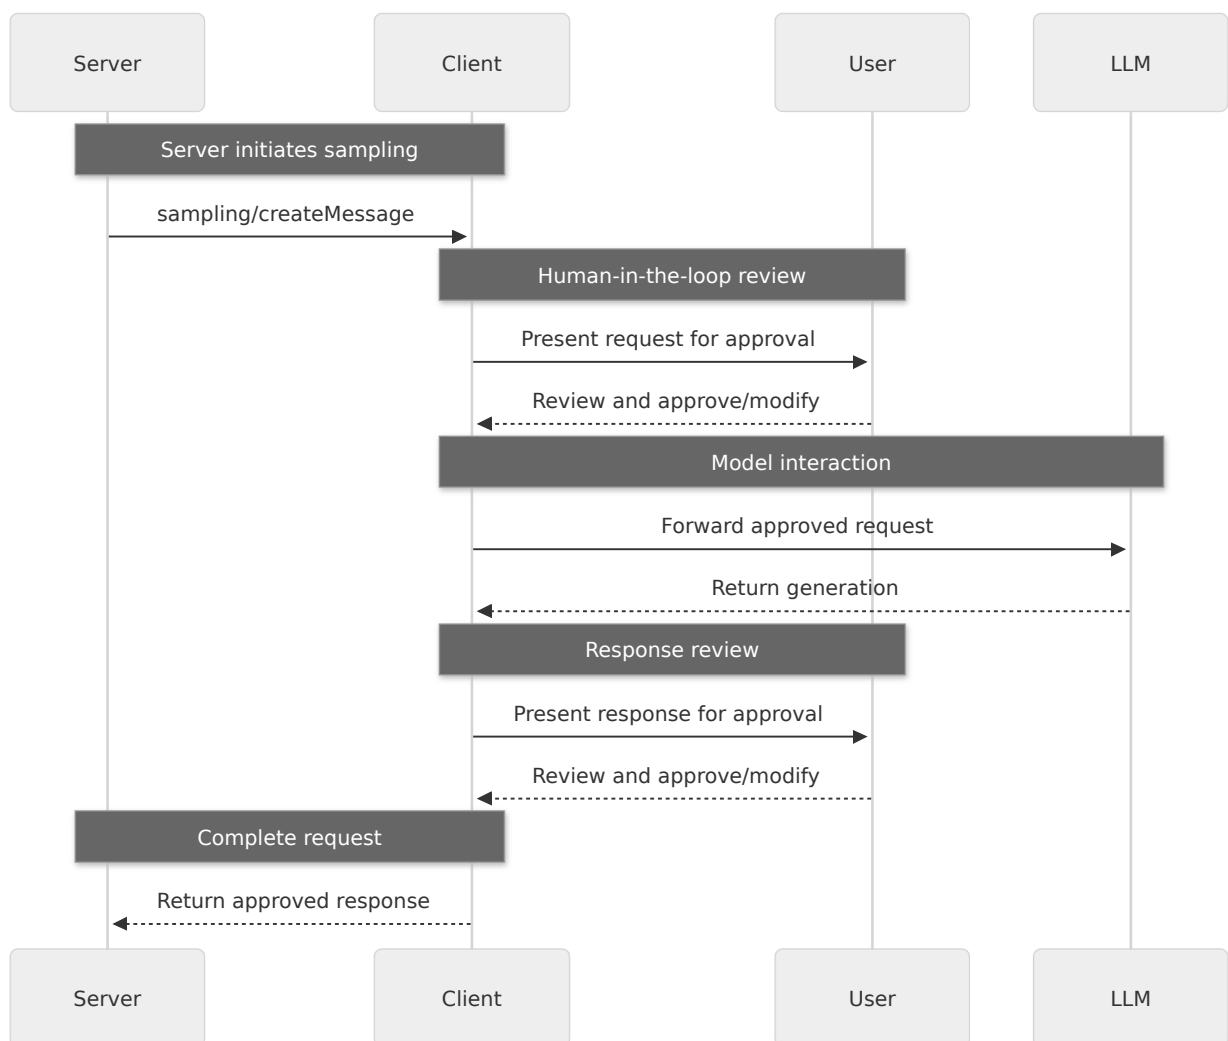

Data Types

Messages

Sampling messages can contain:

Text Content

```
{
  "type": "text",
  "text": "The message content"
}
```

Image Content

```
{
  "type": "image",
  "data": "base64-encoded-image-data",
  "mimeType": "image/jpeg"
}
```

Model Preferences

Model selection in MCP requires careful abstraction since servers and clients may use different AI providers with distinct model offerings. A server cannot simply request a specific model by name since the client may not have access to that exact model or may prefer to use a different provider's equivalent model.

To solve this, MCP implements a preference system that combines abstract capability priorities with optional model hints:

Capability Priorities

Servers express their needs through three normalized priority values (0-1):

- `costPriority` : How important is minimizing costs? Higher values prefer cheaper models.
- `speedPriority` : How important is low latency? Higher values prefer faster models.
- `intelligencePriority` : How important are advanced capabilities? Higher values prefer more capable models.

Model Hints

While priorities help select models based on characteristics, `hints` allow servers to suggest specific models or model families:

- Hints are treated as substrings that can match model names flexibly
- Multiple hints are evaluated in order of preference
- Clients **MAY** map hints to equivalent models from different providers
- Hints are advisory—clients make final model selection

For example:

```
{
  "hints": [
    { "name": "claude-3-sonnet" }, // Prefer Sonnet-class models
    { "name": "claude" } // Fall back to any Claude model
  ],
  "costPriority": 0.3, // Cost is less important
  "speedPriority": 0.8, // Speed is very important
  "intelligencePriority": 0.5 // Moderate capability needs
}
```

The client processes these preferences to select an appropriate model from its available options. For instance, if the client doesn't have access to Claude models but has Gemini, it might map the sonnet hint to `gemini-1.5-pro` based on similar capabilities.

Error Handling

Clients **SHOULD** return errors for common failure cases:

Example error:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "error": {
    "code": -1,
    "message": "User rejected sampling request"
  }
}
```

Security Considerations

1. Clients **SHOULD** implement user approval controls
2. Both parties **SHOULD** validate message content
3. Clients **SHOULD** respect model preference hints
4. Clients **SHOULD** implement rate limiting
5. Both parties **MUST** handle sensitive data appropriately

5 Server Features

5.1 Overview

Servers provide the fundamental building blocks for adding context to language models via MCP. These primitives enable rich interactions between clients, servers, and language models:

- **Prompts:** Pre-defined templates or instructions that guide language model interactions
- **Resources:** Structured data or content that provides additional context to the model
- **Tools:** Executable functions that allow models to perform actions or retrieve information

Each primitive can be summarized in the following control hierarchy:

Primitive	Control	Description	Example
Prompts	User-controlled	Interactive templates invoked by user choice	Slash commands, menu options
Resources	Application-controlled	Contextual data attached and managed by the client	File contents, git history
Tools	Model-controlled	Functions exposed to the LLM to take actions	API POST requests, file writing

Explore these key primitives in more detail below:

Prompts

Resources

Tools

5.2 Prompts

The Model Context Protocol (MCP) provides a standardized way for servers to expose prompt templates to clients. Prompts allow servers to provide structured messages and instructions for interacting with language models. Clients can discover available prompts, retrieve their contents, and provide arguments to customize them.

User Interaction Model

Prompts are designed to be **user-controlled**, meaning they are exposed from servers to clients with the intention of the user being able to explicitly select them for use.

Typically, prompts would be triggered through user-initiated commands in the user interface, which allows users to naturally discover and invoke available prompts.

For example, as slash commands:



However, implementors are free to expose prompts through any interface pattern that suits their needs—the protocol itself does not mandate any specific user interaction model.

Capabilities

Servers that support prompts **MUST** declare the `prompts` capability during initialization:

```
{
  "capabilities": {
    "prompts": {
      "listChanged": true
    }
  }
}
```

`listChanged` indicates whether the server will emit notifications when the list of available prompts changes.

Protocol Messages

Listing Prompts

To retrieve available prompts, clients send a `prompts/list` request. This operation supports pagination.

Request:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "method": "prompts/list",
  "params": {
    "cursor": "optional-cursor-value"
  }
}
```

Response:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "result": {
    "prompts": [
      {
        "name": "code_review",
        "description": "Asks the LLM to analyze code quality and suggest improvements",
        "arguments": [
          {
            "name": "code",
            "description": "The code to review",
            "required": true
          }
        ]
      }
    ],
    "nextCursor": "next-page-cursor"
  }
}
```

Getting a Prompt

To retrieve a specific prompt, clients send a `prompts/get` request. Arguments may be auto-completed through the completion API.

Request:

```
{
  "jsonrpc": "2.0",
  "id": 2,
  "method": "prompts/get",
  "params": {
    "name": "code_review",
    "arguments": {
      "code": "def hello():\n    print('world')"
    }
  }
}
```

Response:


```
{
  "jsonrpc": "2.0",
  "id": 2,
  "result": {
    "description": "Code review prompt",
    "messages": [
      {
        "role": "user",
        "content": {
          "type": "text",
          "text": "Please review this Python code:\ndef hello():\n    print('world')"
        }
      ]
    }
  }
}
```

List Changed Notification

When the list of available prompts changes, servers that declared the `listChanged` capability **SHOULD** send a notification:

```
{
  "jsonrpc": "2.0",
  "method": "notifications/prompts/list_changed"
}
```

Message Flow

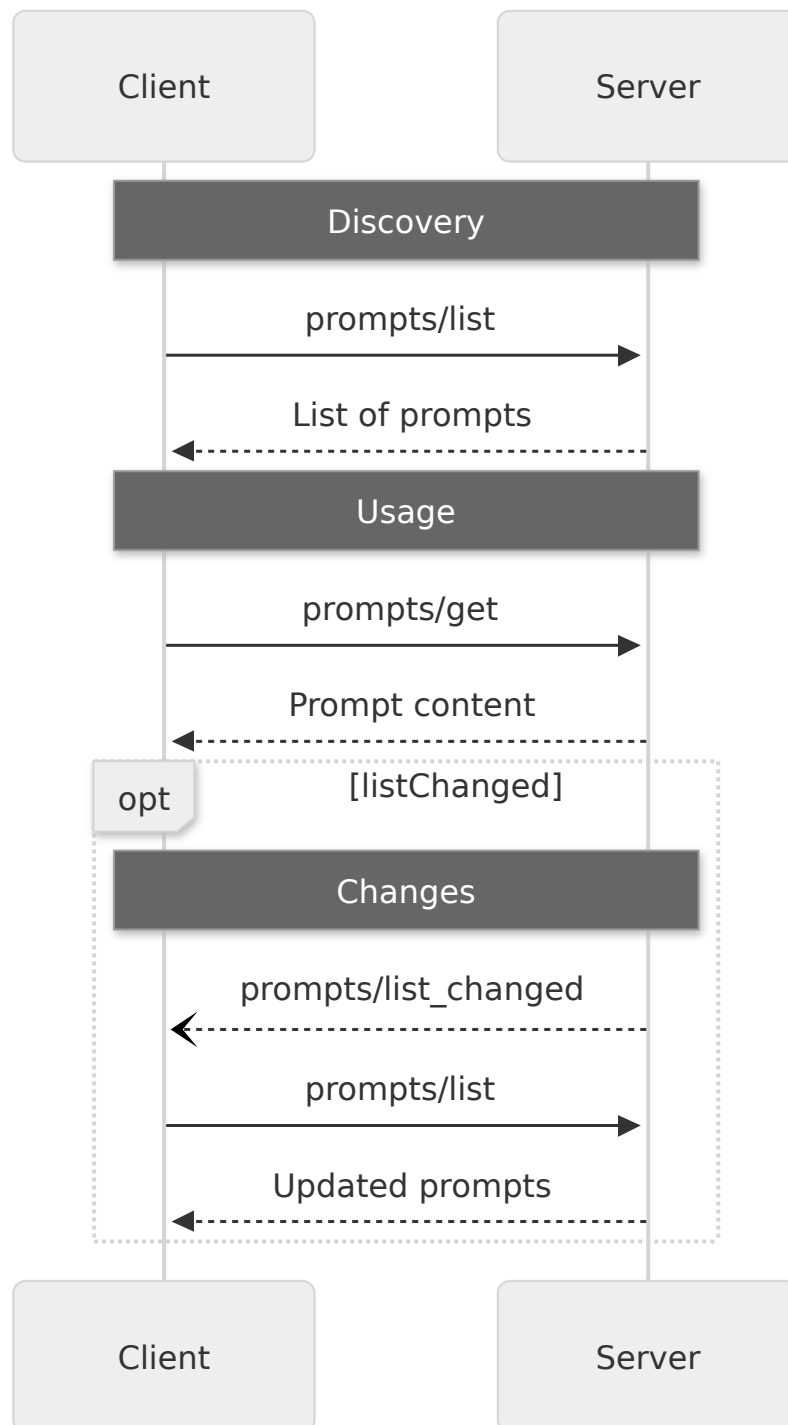

Data Types

Prompt

A prompt definition includes:

- `name` : Unique identifier for the prompt
- `description` : Optional human-readable description
- `arguments` : Optional list of arguments for customization

PromptMessage

Messages in a prompt can contain:

- `role` : Either "user" or "assistant" to indicate the speaker
- `content` : One of the following content types:

Text Content

Text content represents plain text messages:

```
{
  "type": "text",
  "text": "The text content of the message"
}
```

This is the most common content type used for natural language interactions.

Image Content

Image content allows including visual information in messages:

```
{
  "type": "image",
  "data": "base64-encoded-image-data",
  "mimeType": "image/png"
}
```

The image data **MUST** be base64-encoded and include a valid MIME type. This enables multi-modal interactions where visual context is important.

Embedded Resources

Embedded resources allow referencing server-side resources directly in messages:

```
{
  "type": "resource",
  "resource": {
    "uri": "resource://example",
    "mimeType": "text/plain",
    "text": "Resource content"
  }
}
```

Resources can contain either text or binary (blob) data and **MUST** include:

- A valid resource URI
- The appropriate MIME type
- Either text content or base64-encoded blob data

Embedded resources enable prompts to seamlessly incorporate server-managed content like documentation, code samples, or other reference materials directly into the conversation flow.

Error Handling

Servers **SHOULD** return standard JSON-RPC errors for common failure cases:

- Invalid prompt name: `-32602` (Invalid params)
- Missing required arguments: `-32602` (Invalid params)
- Internal errors: `-32603` (Internal error)

Implementation Considerations

1. Servers **SHOULD** validate prompt arguments before processing
2. Clients **SHOULD** handle pagination for large prompt lists
3. Both parties **SHOULD** respect capability negotiation

Security

Implementations **MUST** carefully validate all prompt inputs and outputs to prevent injection attacks or unauthorized access to resources.

5.3 Resources


The Model Context Protocol (MCP) provides a standardized way for servers to expose resources to clients. Resources allow servers to share data that provides context to language models, such as files, database schemas, or application-specific information. Each resource is uniquely identified by a URI.

User Interaction Model

Resources in MCP are designed to be **application-driven**, with host applications determining how to incorporate context based on their needs.

For example, applications could:

- Expose resources through UI elements for explicit selection, in a tree or list view
- Allow the user to search through and filter available resources
- Implement automatic context inclusion, based on heuristics or the AI model's selection

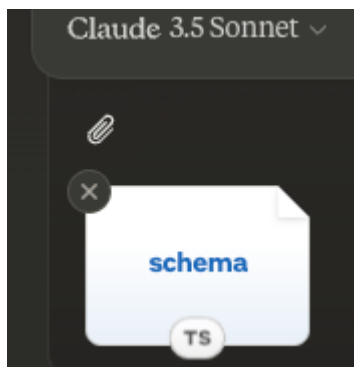

However, implementations are free to expose resources through any interface pattern that suits their needs—the protocol itself does not mandate any specific user interaction model.

Capabilities

Servers that support resources **MUST** declare the `resources` capability:

```
{
  "capabilities": {
    "resources": {
      "subscribe": true,
      "listChanged": true
    }
  }
}
```

The capability supports two optional features:

- `subscribe` : whether the client can subscribe to be notified of changes to individual resources.
- `listChanged` : whether the server will emit notifications when the list of available resources changes.

Both `subscribe` and `listChanged` are optional—servers can support neither, either, or both:

```
{
  "capabilities": {
    "resources": {} // Neither feature supported
  }
}
```

```
{
  "capabilities": {
    "resources": {
      "subscribe": true // Only subscriptions supported
    }
  }
}
```

```
{
  "capabilities": {
    "resources": {
      "listChanged": true // Only list change notifications supported
    }
  }
}
```

Protocol Messages

Listing Resources

To discover available resources, clients send a `resources/list` request. This operation supports pagination.

Request:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "method": "resources/list",
  "params": {
    "cursor": "optional-cursor-value"
  }
}
```

Response:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "result": {
    "resources": [
      {
        "uri": "file:///project/src/main.rs",
        "name": "main.rs",
        "description": "Primary application entry point",
        "mimeType": "text/x-rust"
      }
    ],
    "nextCursor": "next-page-cursor"
  }
}
```

Reading Resources

To retrieve resource contents, clients send a `resources/read` request:

Request:

```
{
  "jsonrpc": "2.0",
  "id": 2,
  "method": "resources/read",
  "params": {
    "uri": "file:///project/src/main.rs"
  }
}
```

Response:

```
{
  "jsonrpc": "2.0",
  "id": 2,
  "result": {
    "contents": [
      {
        "uri": "file:///project/src/main.rs",
        "mimeType": "text/x-rust",
        "text": "fn main() {\n    println!(\"Hello world!\");\n}"
      }
    ]
  }
}
```

Resource Templates

Resource templates allow servers to expose parameterized resources using [URI templates](#). Arguments may be auto-completed through the completion API. This operation supports pagination.

Request:

```
{
  "jsonrpc": "2.0",
  "id": 3,
  "method": "resources/templates/list",
  "params": {
    "cursor": "optional-cursor-value"
  }
}
```

Response:

```
{
  "jsonrpc": "2.0",
  "id": 3,
  "result": {
    "resourceTemplates": [
      {
        "uriTemplate": "file:///path",
        "name": "Project Files",
        "description": "Access files in the project directory",
        "mimeType": "application/octet-stream"
      }
    ],
    "nextCursor": "next-page-cursor"
  }
}
```

List Changed Notification

When the list of available resources changes, servers that declared the `listChanged` capability **SHOULD** send a notification:

```
{
  "jsonrpc": "2.0",
  "method": "notifications/resources/list_changed"
}
```

Subscriptions

The protocol supports optional subscriptions to resource changes. Clients can subscribe to specific resources and receive notifications when they change:


Subscribe Request:

```
{
  "jsonrpc": "2.0",
  "id": 4,
  "method": "resources/subscribe",
  "params": {
    "uri": "file:///project/src/main.rs"
  }
}
```

Update Notification:

```
{  
  "jsonrpc": "2.0",  
  "method": "notifications/resources/updated",  
  "params": {  
    "uri": "file:///project/src/main.rs"  
  }  
}
```

Message Flow

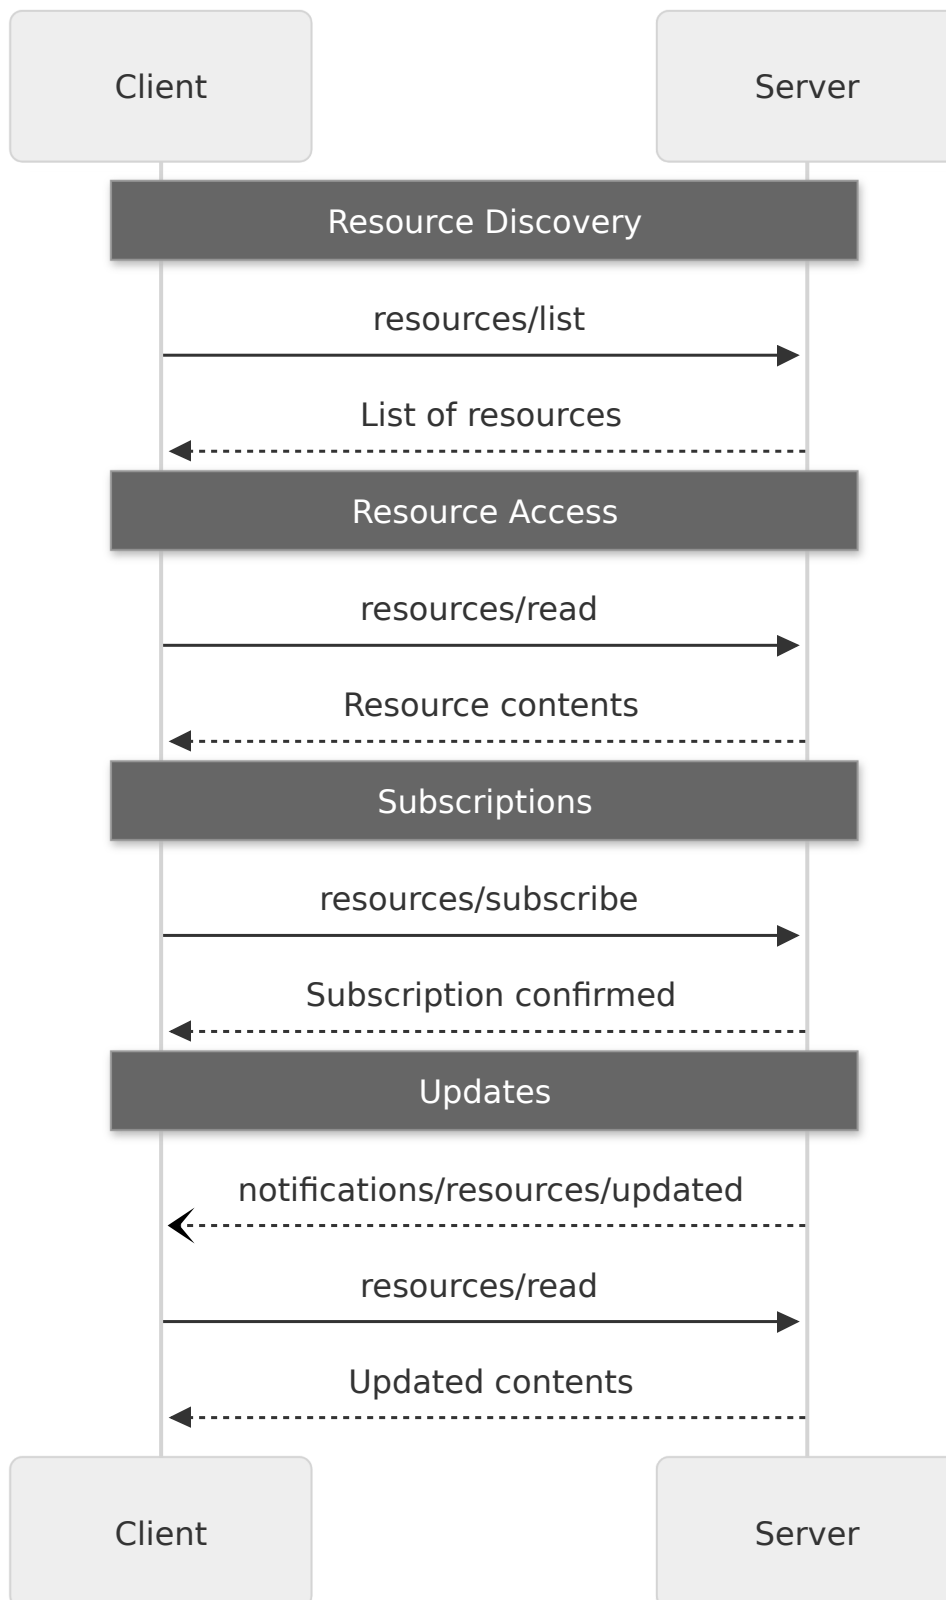

Data Types

Resource

A resource definition includes:

- `uri` : Unique identifier for the resource
- `name` : Human-readable name
- `description` : Optional description
- `mimeType` : Optional MIME type

Resource Contents

Resources can contain either text or binary data:

Text Content

```
{
  "uri": "file:///example.txt",
  "mimeType": "text/plain",
  "text": "Resource content"
}
```

Binary Content

```
{
  "uri": "file:///example.png",
  "mimeType": "image/png",
  "blob": "base64-encoded-data"
}
```

Common URI Schemes

The protocol defines several standard URI schemes. This list not exhaustive—implementations are always free to use additional, custom URI schemes.

https://

Used to represent a resource available on the web.

Servers **SHOULD** use this scheme only when the client is able to fetch and load the resource directly from the web on its own—that is, it doesn't need to read the resource via the MCP server.

For other use cases, servers **SHOULD** prefer to use another URI scheme, or define a custom one, even if the server will itself be downloading resource contents over the internet.

file://

Used to identify resources that behave like a filesystem. However, the resources do not need to map to an actual physical filesystem.

MCP servers **MAY** identify file:// resources with an XDG MIME type, like `inode/directory`, to represent non-regular files (such as directories) that don't otherwise have a standard MIME type.

git://

Git version control integration.

Error Handling

Servers **SHOULD** return standard JSON-RPC errors for common failure cases:

- Resource not found: `-32002`
- Internal errors: `-32603`

Example error:

```
{
  "jsonrpc": "2.0",
  "id": 5,
  "error": {
    "code": -32002,
    "message": "Resource not found",
    "data": {
      "uri": "file:///nonexistent.txt"
    }
  }
}
```

Security Considerations

1. Servers **MUST** validate all resource URIs
2. Access controls **SHOULD** be implemented for sensitive resources
3. Binary data **MUST** be properly encoded
4. Resource permissions **SHOULD** be checked before operations

5.4 Tools

The Model Context Protocol (MCP) allows servers to expose tools that can be invoked by language models. Tools enable models to interact with external systems, such as querying databases, calling APIs, or performing computations. Each tool is uniquely identified by a name and includes metadata describing its schema.

User Interaction Model

Tools in MCP are designed to be **model-controlled**, meaning that the language model can discover and invoke tools automatically based on its contextual understanding and the user's prompts.

However, implementations are free to expose tools through any interface pattern that suits their needs—the protocol itself does not mandate any specific user interaction model.

WARNING

For trust & safety and security, there **SHOULD** always be a human in the loop with the ability to deny tool invocations.

Applications **SHOULD**:

- Provide UI that makes clear which tools are being exposed to the AI model
- Insert clear visual indicators when tools are invoked
- Present confirmation prompts to the user for operations, to ensure a human is in the loop

Capabilities

Servers that support tools **MUST** declare the `tools` capability:

```
{
  "capabilities": {
    "tools": {
      "listChanged": true
    }
  }
}
```

`listChanged` indicates whether the server will emit notifications when the list of available tools changes.

Protocol Messages

Listing Tools

To discover available tools, clients send a `tools/list` request. This operation supports pagination.

Request:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "method": "tools/list",
  "params": {
    "cursor": "optional-cursor-value"
  }
}
```

Response:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "result": {
    "tools": [
      {
        "name": "get_weather",
        "description": "Get current weather information for a location",
        "inputSchema": {
          "type": "object",
          "properties": {
            "location": {
              "type": "string",
              "description": "City name or zip code"
            }
          },
          "required": ["location"]
        }
      },
    ],
    "nextCursor": "next-page-cursor"
  }
}
```

Calling Tools

To invoke a tool, clients send a `tools/call` request:

Request:

```
{
  "jsonrpc": "2.0",
  "id": 2,
  "method": "tools/call",
  "params": {
    "name": "get_weather",
    "arguments": {
      "location": "New York"
    }
  }
}
```

Response:


```
{
  "jsonrpc": "2.0",
  "id": 2,
  "result": {
    "content": [
      {
        "type": "text",
        "text": "Current weather in New York:\nTemperature: 72°F\nConditions: Partly cloudy"
      }
    ],
    "isError": false
  }
}
```

List Changed Notification

When the list of available tools changes, servers that declared the `listChanged` capability **SHOULD** send a notification:

```
{
  "jsonrpc": "2.0",
  "method": "notifications/tools/list_changed"
}
```

Message Flow

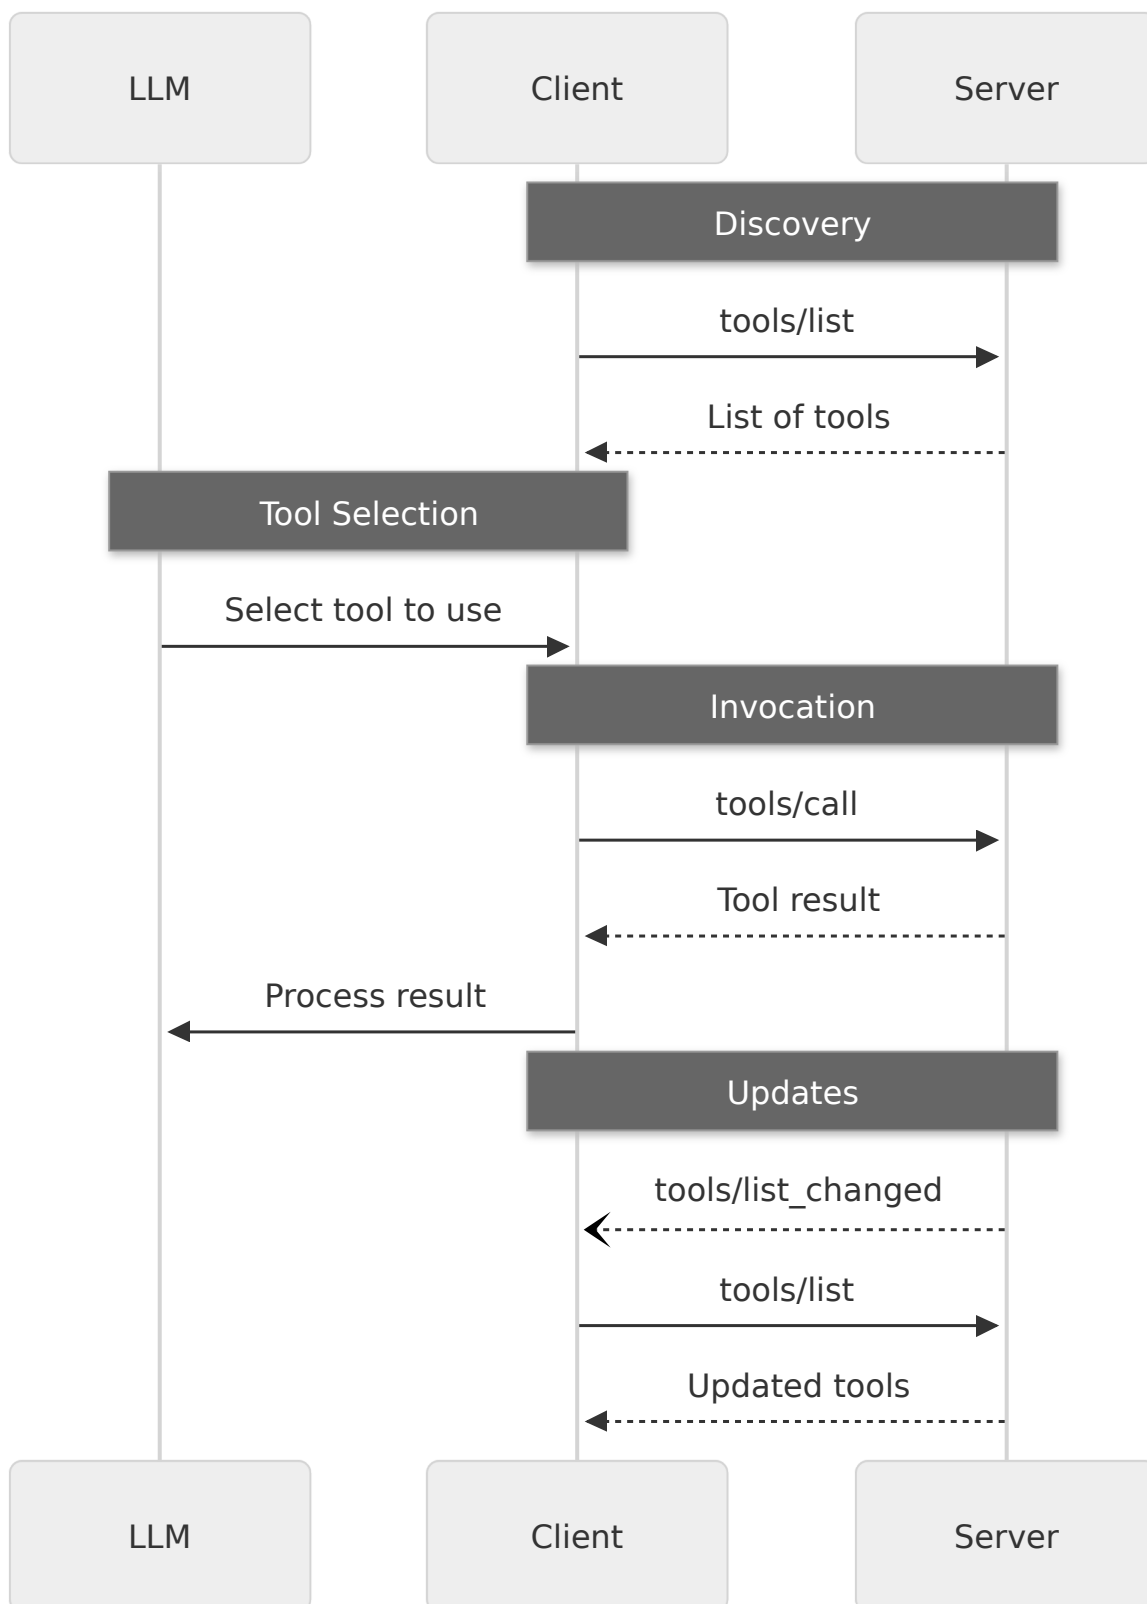

Data Types

Tool

A tool definition includes:

- `name` : Unique identifier for the tool
- `description` : Human-readable description of functionality
- `inputSchema` : JSON Schema defining expected parameters

Tool Result

Tool results can contain multiple content items of different types:

Text Content

```
{
  "type": "text",
  "text": "Tool result text"
}
```

Image Content

```
{
  "type": "image",
  "data": "base64-encoded-data",
  "mimeType": "image/png"
}
```

Embedded Resources

Resources **MAY** be embedded, to provide additional context or data, behind a URI that can be subscribed to or fetched again by the client later:

```
{
  "type": "resource",
  "resource": {
    "uri": "resource://example",
    "mimeType": "text/plain",
    "text": "Resource content"
  }
}
```

Error Handling

Tools use two error reporting mechanisms:

1. **Protocol Errors:** Standard JSON-RPC errors for issues like:
 - Unknown tools
 - Invalid arguments
 - Server errors
2. **Tool Execution Errors:** Reported in tool results with `isError: true`:
 - API failures
 - Invalid input data
 - Business logic errors

Example protocol error:

```
{
  "jsonrpc": "2.0",
  "id": 3,
  "error": {
    "code": -32602,
    "message": "Unknown tool: invalid_tool_name"
  }
}
```

Example tool execution error:

```
{
  "jsonrpc": "2.0",
  "id": 4,
  "result": {
    "content": [
      {
        "type": "text",
        "text": "Failed to fetch weather data: API rate limit exceeded"
      }
    ],
    "isError": true
  }
}
```

Security Considerations

1. Servers **MUST**:
 - Validate all tool inputs

- Implement proper access controls
- Rate limit tool invocations
- Sanitize tool outputs

2. Clients **SHOULD**:

- Prompt for user confirmation on sensitive operations
- Show tool inputs to the user before calling the server, to avoid malicious or accidental data exfiltration
- Validate tool results before passing to LLM
- Implement timeouts for tool calls
- Log tool usage for audit purposes

5.5 Utilities

5.5.1 Completion

The Model Context Protocol (MCP) provides a standardized way for servers to offer argument autocompletion suggestions for prompts and resource URIs. This enables rich, IDE-like experiences where users receive contextual suggestions while entering argument values.

User Interaction Model

Completion in MCP is designed to support interactive user experiences similar to IDE code completion.

For example, applications may show completion suggestions in a dropdown or popup menu as users type, with the ability to filter and select from available options.

However, implementations are free to expose completion through any interface pattern that suits their needs—the protocol itself does not mandate any specific user interaction model.

Protocol Messages

Requesting Completions

To get completion suggestions, clients send a `completion/complete` request specifying what is being completed through a reference type:

Request:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "method": "completion/complete",
  "params": {
    "ref": {
      "type": "ref/prompt",
      "name": "code_review"
    },
    "argument": {
      "name": "language",
      "value": "py"
    }
  }
}
```

Response:

```
{
  "jsonrpc": "2.0",
  "id": 1,
  "result": {
    "completion": {
      "values": ["python", "pytorch", "pyside"],
      "total": 10,
      "hasMore": true
    }
  }
}
```

Reference Types

The protocol supports two types of completion references:


Type	Description	Example
ref/prompt	References a prompt by name	<code>{"type": "ref/prompt", "name": "code_review"}</code>
ref/resource	References a resource URI	<code>{"type": "ref/resource", "uri": "file:///path"}</code>

Completion Results

Servers return an array of completion values ranked by relevance, with:

- Maximum 100 items per response
- Optional total number of available matches
- Boolean indicating if additional results exist

Message Flow

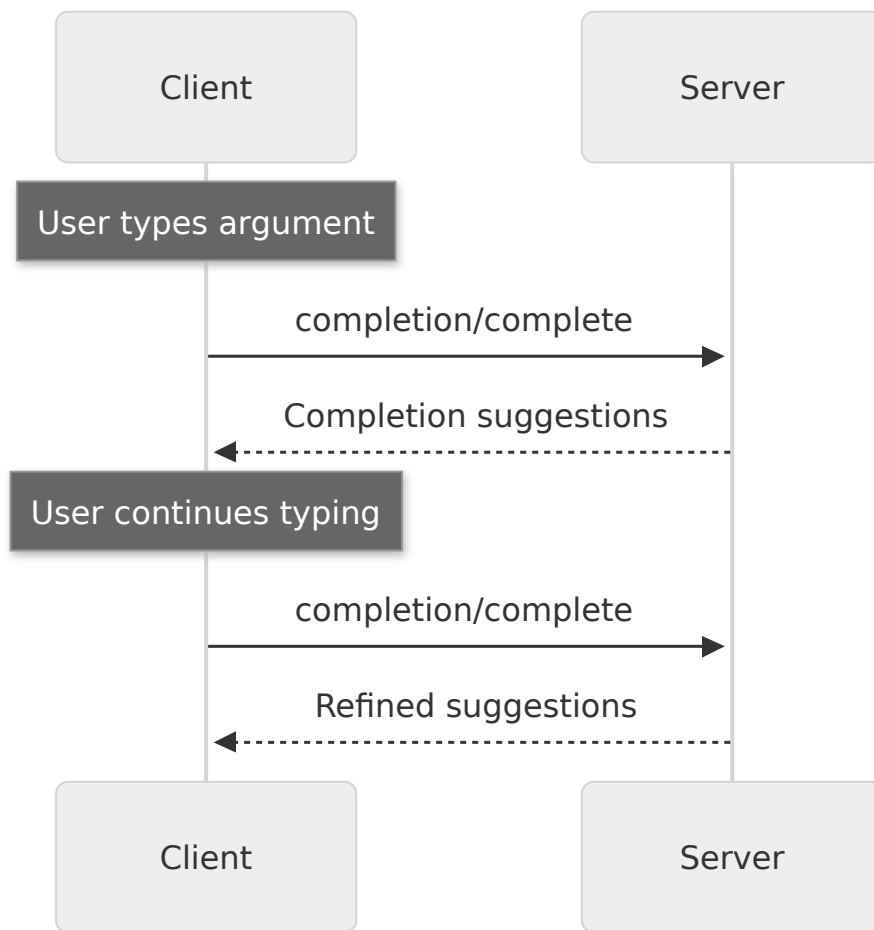

Data Types

CompleteRequest

- `ref` : A `PromptReference` or `ResourceReference`
- `argument` : Object containing:
 - `name` : Argument name
 - `value` : Current value

CompleteResult

- `completion` : Object containing:
 - `values` : Array of suggestions (max 100)
 - `total` : Optional total matches
 - `hasMore` : Additional results flag

Implementation Considerations

1. Servers **SHOULD**:

- Return suggestions sorted by relevance
- Implement fuzzy matching where appropriate
- Rate limit completion requests
- Validate all inputs

2. Clients **SHOULD**:

- Debounce rapid completion requests
- Cache completion results where appropriate
- Handle missing or partial results gracefully

Security

Implementations **MUST**:

- Validate all completion inputs
- Implement appropriate rate limiting
- Control access to sensitive suggestions
- Prevent completion-based information disclosure

5.5.2 Logging

The Model Context Protocol (MCP) provides a standardized way for servers to send structured log messages to clients. Clients can control logging verbosity by setting minimum log levels, with servers sending notifications containing severity levels, optional logger names, and arbitrary JSON-serializable data.

User Interaction Model

Implementations are free to expose logging through any interface pattern that suits their needs—the protocol itself does not mandate any specific user interaction model.

Capabilities

Servers that emit log message notifications **MUST** declare the `logging` capability:

```
{
  "capabilities": {
    "logging": {}
  }
}
```

Log Levels

The protocol follows the standard syslog severity levels specified in [RFC 5424](#):

Level	Description	Example Use Case
debug	Detailed debugging information	Function entry/exit points
info	General informational messages	Operation progress updates
notice	Normal but significant events	Configuration changes
warning	Warning conditions	Deprecated feature usage
error	Error conditions	Operation failures
critical	Critical conditions	System component failures
alert	Action must be taken immediately	Data corruption detected
emergency	System is unusable	Complete system failure

Protocol Messages

Setting Log Level

To configure the minimum log level, clients **MAY** send a `logging/setLevel` request:

Request:


```
{
  "jsonrpc": "2.0",
  "id": 1,
  "method": "logging/setLevel",
  "params": {
    "level": "info"
  }
}
```

Log Message Notifications

Servers send log messages using `notifications/message` notifications:

```
{
  "jsonrpc": "2.0",
  "method": "notifications/message",
  "params": {
    "level": "error",
    "logger": "database",
    "data": {
      "error": "Connection failed",
      "details": {
        "host": "localhost",
        "port": 5432
      }
    }
  }
}
```

Message Flow

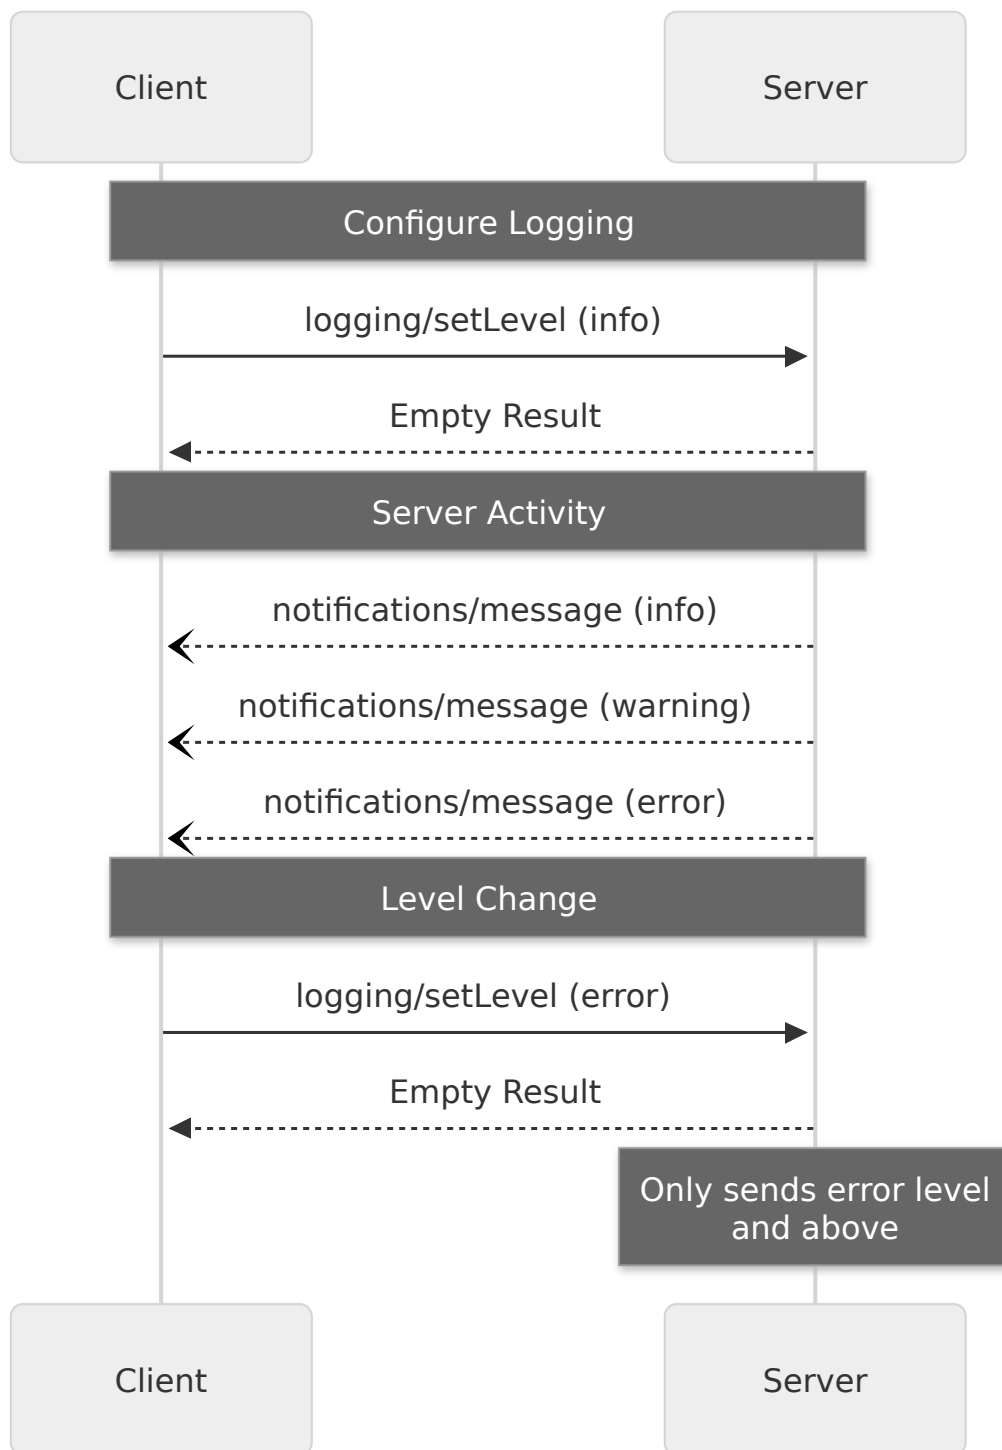

Error Handling

Servers **SHOULD** return standard JSON-RPC errors for common failure cases:

- Invalid log level: `-32602` (Invalid params)
- Configuration errors: `-32603` (Internal error)

Implementation Considerations

1. Servers **SHOULD**:

- Rate limit log messages
- Include relevant context in data field
- Use consistent logger names
- Remove sensitive information

2. Clients **MAY**:

- Present log messages in the UI
- Implement log filtering/search
- Display severity visually
- Persist log messages

Security

1. Log messages **MUST NOT** contain:

- Credentials or secrets
- Personal identifying information
- Internal system details that could aid attacks

2. Implementations **SHOULD**:

- Rate limit messages
- Validate all data fields
- Control log access
- Monitor for sensitive content

5.5.3 Pagination

The Model Context Protocol (MCP) supports paginating list operations that may return large result sets. Pagination allows servers to yield results in smaller chunks rather than all at once.

Pagination is especially important when connecting to external services over the internet, but also useful for local integrations to avoid performance issues with large data sets.

Pagination Model

Pagination in MCP uses an opaque cursor-based approach, instead of numbered pages.

- The **cursor** is an opaque string token, representing a position in the result set
- **Page size** is determined by the server, and clients **MUST NOT** assume a fixed page size

Response Format

Pagination starts when the server sends a **response** that includes:

- The current page of results
- An optional `nextCursor` field if more results exist


```
{
  "jsonrpc": "2.0",
  "id": "123",
  "result": {
    "resources": [...],
    "nextCursor": "eyJwYWdlIjogM30="
  }
}
```

Request Format

After receiving a cursor, the client can *continue* paginating by issuing a request including that cursor:

```
{
  "jsonrpc": "2.0",
  "method": "resources/list",
  "params": {
    "cursor": "eyJwYWdlIjogMn0="
  }
}
```

Pagination Flow

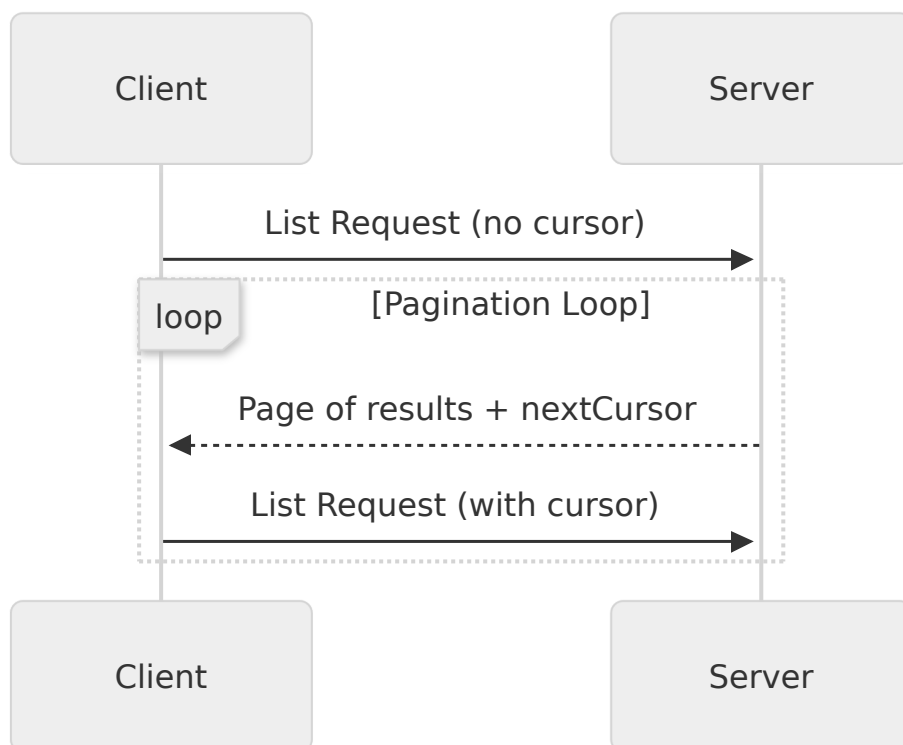

Operations Supporting Pagination

The following MCP operations support pagination:

- `resources/list` - List available resources
- `resources/templates/list` - List resource templates
- `prompts/list` - List available prompts
- `tools/list` - List available tools

Implementation Guidelines

1. Servers **SHOULD**:

- Provide stable cursors

- Handle invalid cursors gracefully

2. Clients **SHOULD**:

- Treat a missing `nextCursor` as the end of results
- Support both paginated and non-paginated flows

3. Clients **MUST** treat cursors as opaque tokens:

- Don't make assumptions about cursor format
- Don't attempt to parse or modify cursors
- Don't persist cursors across sessions

Error Handling

Invalid cursors **SHOULD** result in an error with code -32602 (Invalid params).